CELESTION

HF Compression Drivers CDX14-3035



1.4in exit, ferrite magnet, single piece titanium diaphragm HF compression driver

- Single piece titanium diaphragm and surround
- Enhanced surround shape for greater linearity
- High temperature polymer clamp ring minimises distortion

240W Continuous

power rating

108dB sensitivity

3in

Edgewound clad

copper voice aluminium coil

General Specifications

120W Power Rating Continuous power rating 240W Rated impedance 8 ohm Sensitivity 108dB 500-20,000Hz Frequency range 800

Recommended min. crossover (12

dB/oct) Magnet type

Voice coil diameter

Ferrite 75mm / 3in

Voice coil material Edgewound copper clad

aluminium Diaphragm material Titanium Surround material Titanium

Mounting Information


Width 180mm / 7in Depth 69mm / 2.7in Fitting Bolt (4 x M6 holes on a 102mm/4in PCD) Throat exit 35mm / 1.4in Unit weight 5.4kg / 11.9lb

Packed Dimensions & Weight

Single pack size W x D x H 240mm x 200mm x 100mm / x

9.4in 8in x 4in Single pack weight 6kg / 12.2lb

Frequency Response and Impedance Curves

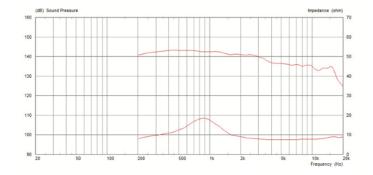

Frequency Response and Impedance Curves

