

## HF Compression Drivers

### CDX1-1731

1-inch exit neodymium magnet compression driver



- 2,200Hz recommended min. crossover freq (12dB/oct)
- Single piece PETP film diaphragm and surround
- Sound Castle diaphragm assembly
- Screw fitting


### General Specifications

Power Rating	40W
Continuous power rating	80W
Rated impedance	8 $\Omega$
Sensitivity	110dB
Frequency range	1200-20,000Hz
Recommended min. crossover (12dB/oct)	2200Hz
Magnet type	Neodymium
Voice coil diameter	44mm / 1.75in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	PETP film
Surround material	PETP film
Additional impedances	16?


### Mounting Information

Width	88.5mm / 3.48in
Depth	55mm / 2.2in
Fitting	Screw (35mm/1.38in diameter)
Bolt version	CDX1-1730
Throat exit	25mm / 1in
Unit weight	0.65kg / 1.4lb

## Frequency Response and Impedance Curves

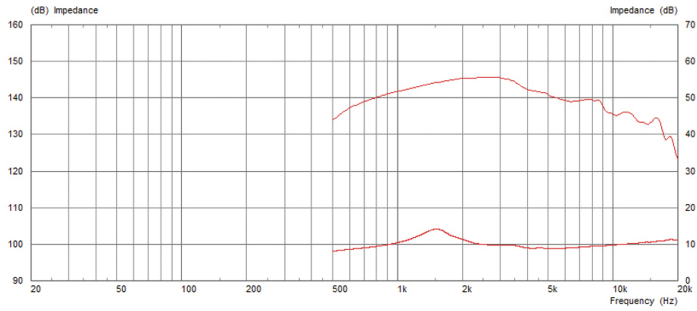

### Measured - Plane Wave Tube

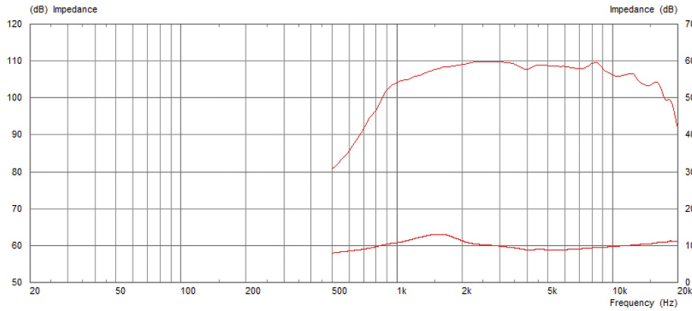

### Measured - Exponential Horn 90° x 40° radiation pattern

**Power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

## Packed Dimensions & Weight

Single pack size W x D x H	90mm x 90mm x 60mm / 3.5in x 3.5in x 2.4 in
Single pack weight	0.75kg / 1.7lb
Multi pack qty	16
Multi pack size W x D x H	500mm x 485mm x 110mm / 19.7in x 19.1in x 4.3in
Multi pack weight	11.2kg / 24.9lb

## Horns and repair kits

T5510	Diaphragm repair kit 8 Ω
T5523	Diaphragm repair kit 16 Ω
T5359	H19040P Horn
T5134	H17050 No Bell Horn