

### CDX1-1745

1-inch exit ferrite magnet compression driver



- Single piece PETP diaphragm and surround
- Sound Castle diaphragm assembly
- 2,200Hz recommended min. crossover freq (12dB/oct)
- Bolt fitting


### General Specifications

Power Rating	40W
Continuous power rating	80W
Rated impedance	8&ohm
Sensitivity	110dB
Frequency range	1200-20,000Hz
Recommended min. crossover	2200Hz
(12dB/oct)	
Magnet type	Ferrite
Voice coil diameter	44mm / 1.75in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	PETP film
Surround material	PETP film
Additional impedances	16&ohm;


### Mounting Information

Width	120mm / 4.7in
Depth	56mm / 2.2in
Fitting	Bolt (2/3 M6 holes on 76/57mm, 3.0/2.24in PCD)
Screw version	CDX1-1746
Throat exit	25mm / 1in
Unit weight	2.3kg / 5.1lb

Frequency Response and Impedance curves

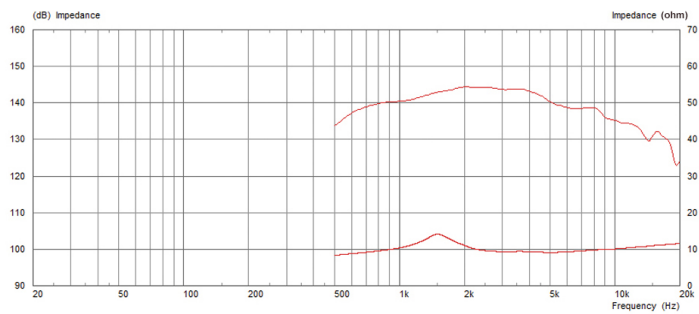

Measured - Plane Wave Tube

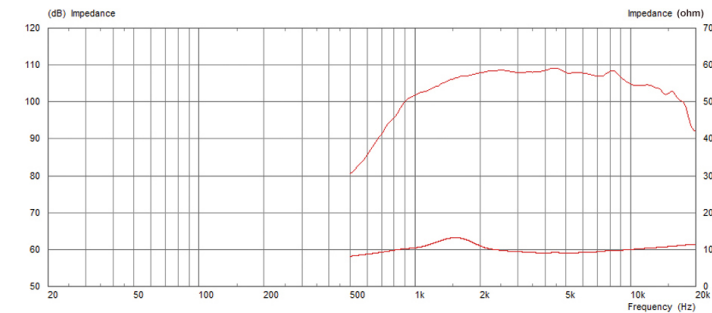

Measured - Exponential Horn 90° x 40° radiation pattern

**Power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

Packed Dimensions & Weight

Single pack size W x D x H	140mm x 170mm x 70mm / 5.5in x 6.7in x 2.8in
Single pack weight	3kg / 6.6lb
Multi pack qty	6
Multi pack size W x D x H	430mm x 370mm x 90mm / 16.9in x 14.6in x 3.5in
Multi pack weight	14kg / 30.8lb

Horns and repair kits

T5510	Diaphragm repair kit 8" x 16" x 16"
T5523	Diaphragm repair kit 16" x 16" x 16"
T5359	H19040P Horn 16" x 16" x 16"
T5134	H17050 No Bell Horn 16" x 16" x 16"

