

HF Compression Drivers

CDX1-1447

1-inch exit ferrite magnet compression driver

- Single piece polyimide diaphragm and surround
- Integrated diaphragm and rear cover for ease of replacement
- 2,200Hz recommended min. crossover freq (12dB/oct)

70W

Continuous power rating

106dB

sensitivity

1.4in

Copper clad aluminium coil voice

General Specifications

Power Rating	35W
Continuous power rating	70W
Rated impedance	8 ohm
Sensitivity	106dB
Frequency range	1500-20,000Hz
Recommended min. crossover (12 dB/oct)	2200Hz
Magnet type	Ferrite
Voice coil diameter	35mm / 1.4in
Voice coil material	Copper clad aluminium
Diaphragm material	Polyimide
Surround material	Polyimide

Mounting Information

Width	90mm / 3.5in
Depth	46.5mm / 1.8in
Fitting	Bolt (4 x M6 holes on 76mm/3in PCD)
Throat exit	25mm / 1in
Unit weight	1.0kg / 2.2lb



Packed Dimensions & Weight

Single pack size W x D x H	110mm x 98mm x 81mm / x x 4.3in 3.9in 3.2in
Single pack weight	1.5kg / 3.3lb
Multi pack qty	16
Multi pack size W x D x H	495mm x 495mm x 90mm / x 19.5in 19.5in x 3.5in
Multi pack weight	17kg / 37.4lb

Horns and repair kits

T6525	Diaphragm repair kit 8 ohm
T5359	H19040P Horn
T5134	H17050 No Bell Horn

Frequency Response and Impedance Curves

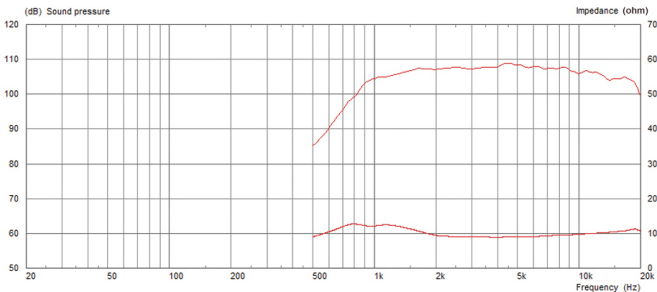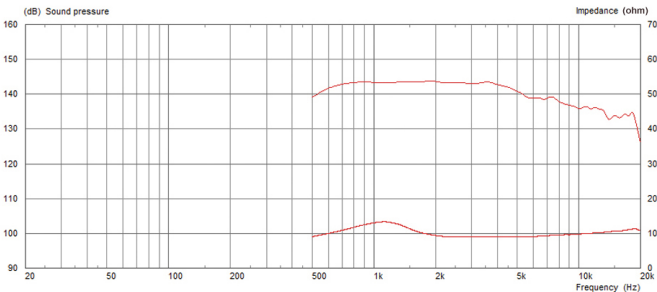

**Power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m, using typical horn, in 2 pi anechoic environment.