

1.4-inch exit neodymium magnet compression driver

- 1,000Hz recommended min. crossover freq (12dB/oct)
- Single piece titanium diaphragm and surround

150W

Continuous power rating

106.5dB

sensitivity

3in

Edgewound clad copper voice aluminium coil

General Specifications

Power Rating	75W
Continuous power rating	150W
Rated impedance	8 ohm
Sensitivity	106.5dB
Frequency range	500-18,000Hz
Recommended min. crossover (12 dB/oct)	1000Hz
Magnet type	Neodymium
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Titanium
Additional impedances	16 ohm

Mounting Information

Width	135mm / 5.3in
Depth	68mm / 2.7in
Fitting	Bolt (4 x M6 holes on 102mm/4in PCD)
Throat exit	35mm / 1.4in
Unit weight	1.4kg / 3.1lb

Repair kits



T6539	Diaphragm repair kit 8 ohm
-------	----------------------------



Packed Dimensions & Weight

Single pack size W x D x H	170mm x 140mm x 75mm / x 6.7in 5.5in x 3.0in
Single pack weight	1.7kg / 3.7lb

Frequency Response and Impedance Curves

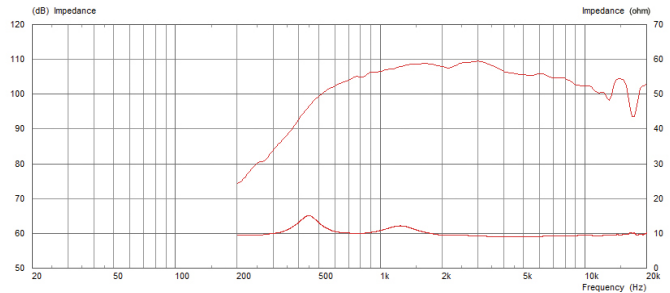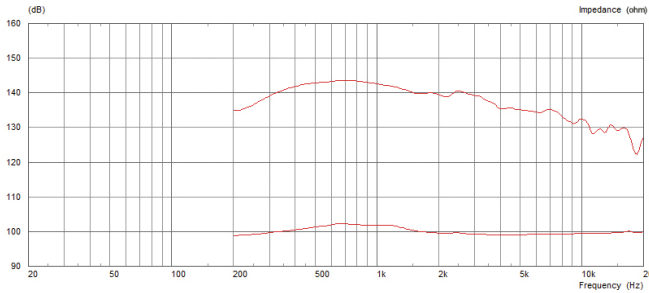

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.