

HF Compression Drivers

CDX14-2420

1.4-inch exit neodymium magnet compression driver

- Maximum modal suppression phase plug
- Deep-drawn titanium diaphragm with polyimide surround
- 1,200Hz recommended min. crossover freq (12dB/oct)

140W

Continuous power rating

106.5dB

sensitivity

2.4in

Edgewound clad copper voice aluminium coil

General Specifications

Power Rating	70W
Continuous power rating	140W
Rated impedance	8 ohm
Sensitivity	106.5dB
Frequency range	800-20,000Hz
Recommended min. crossover (12 dB/oct)	1200Hz
Magnet type	Neodymium
Voice coil diameter	60mm / 2.4in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Polyimide
Additional impedances	16 ohm

Mounting Information

Width	116mm / 4.6in
Depth	56mm / 2.2in
Fitting	Bolt (4 x M6 holes on 102mm/4in PCD)
Throat exit	36mm / 1.4in
Unit weight	1.5kg / 3.3lb



Packed Dimensions & Weight

Single pack size W x D x H	170mm x 140mm x 75mm / x 6.7in 5.5in x 3.0in
Single pack weight	1.8kg / 3.9lb
Multi pack qty	6
Multi pack size W x D x H	500mm x 365mm x 90mm / x 19.7in 14.4in x 3.5in
Multi pack weight	11.5kg / 25.3lb

Repair kits

T6510	Diaphragm repair kit 8 ohm
T5548	Diaphragm repair kit 16 ohm

Frequency Response and Impedance Curves

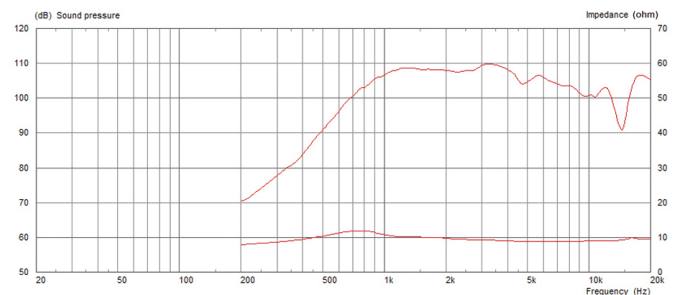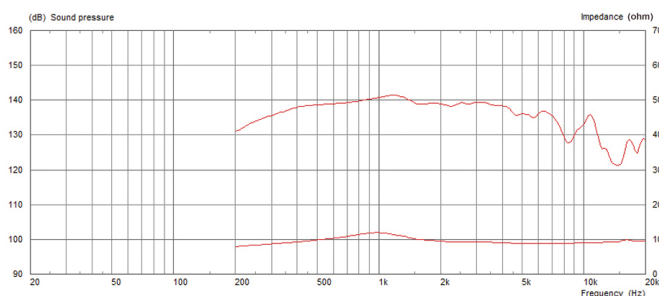

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.