



1.4-inch exit ferrite magnet compression driver

- Single piece titanium diaphragm and surround
- 1,000Hz recommended min. crossover freq (12dB/oct)

200W

Continuous power rating

106.5dB

sensitivity

3in

Edgewound clad copper voice aluminium coil

General Specifications

Power Rating	100W
Continuous power rating	200W
Rated impedance	8 ohm
Sensitivity	106.5dB
Frequency range	500-20,000Hz
Recommended min. crossover (12 dB/oct)	1000Hz
Magnet type	Ferrite
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Titanium

Repair kits

T6509

Diaphragm repair kit 8 ohm



Mounting Information

Width	180mm / 7.0in
Depth	68.0mm / 2.7in
Fitting	Bolt (4 x M6 holes on a 102mm/4in PCD)
Throat exit	35mm / 1.4in
Unit weight	4.9kg / 10.7lb

Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm / x x 8.4in 7.7in 3.2in
Single pack weight	5.1kg / 11.2lb

Frequency Response and Impedance Curves

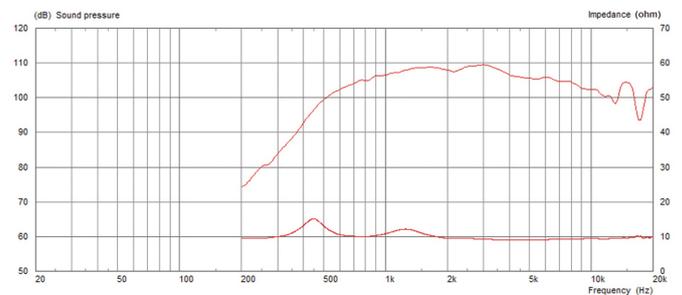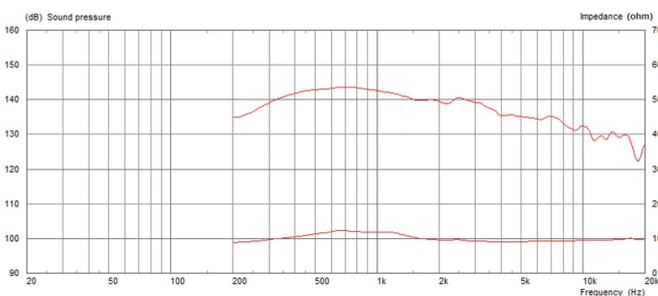

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.