

## HF Compression Drivers

### CDX1-1446

1-inch exit ferrite magnet compression driver



- **2,200Hz recommended min. crossover freq (12dB/oct)**
- **Single piece PETP diaphragm and surround**
- **Integrated diaphragm and rear cover for ease of replacement**
- **Screw fitting**

### General Specifications

Power Rating	20W
Continuous power rating	40W
Rated impedance	8 $\Omega$
Sensitivity	106dB
Frequency range	1500-20,000Hz
Recommended min. crossover (12dB/oct)	2200Hz
Magnet type	Ferrite
Voice coil diameter	35mm / 1.4in
Voice coil material	Copper clad aluminium
Diaphragm material	PETP film
Surround material	PETP film
Additional impedances	16

### Mounting Information

Width	90mm / 3.5in
Depth	52.0mm / 2.1in
Fitting	Screw (35mm/1.38in Diameter)
Bolt version	CDX1-1445
Throat exit	25mm / 1in
Unit weight	1.0kg / 2.2lb


## Frequency Response and Impedance Curves

## Packed Dimensions & Weight


Single pack size W x D x H	110mm x 98mm x 81mm / 4.3in x 3.9in x 3.2in
Single pack weight	1.5kg / 3.3lb
Multi pack qty	16
Multi pack size W x D x H	495mm x 495mm x 90mm / 19.5in x 19.5in x 3.5in
Multi pack weight	17kg / 37.4lb

## Horns and repair kits

T5549	Diaphragm repair kit 8 $\Omega$
T5557	Diaphragm repair kit 16 $\Omega$
T5359	H19040P Horn
T5359	H17050 No Bell Horn

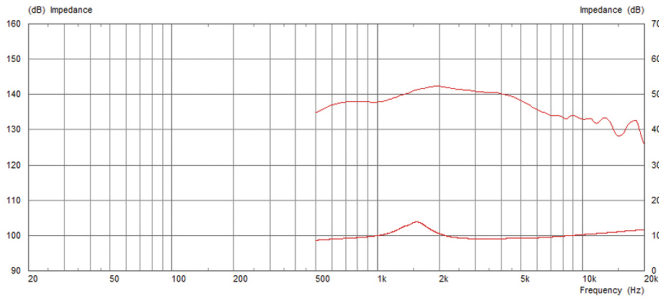

Measured - Plane Wave Tube

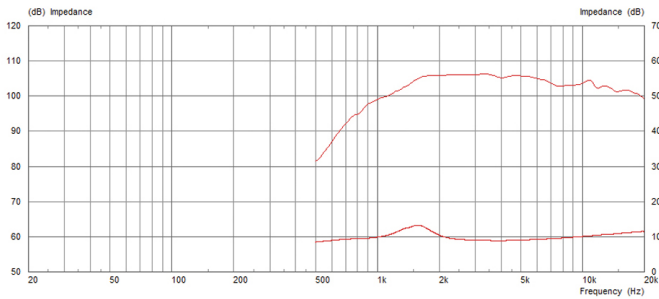

Measured - Exponential Horn 90° x 40° radiation pattern

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2 anechoic environment.