# HF Compression Drivers

# PULSE XL1.10 SUPERTWEETER

### 1-inch exit complete high frequency unit

| 1in | 1in | 15W | 8 | 103 |
|---|---|---|---|---|
| 25.4mm | Voice Coil | Watts | Ohm | dB |

The PULSE XL 1.10 Supertweeter delivers all the sweet treble you could possibly ask for. Featuring a reliable and efficient PETP diaphragm compression driver with integrated horn, it's perfect for bass guitar players who want to extend their frequency range for additional high-end attack.

## General Specifications

| | |
|---|---|
| Power Rating | 15W |
| Continuous power rating | 35W |
| Rated impedance | 8 ohm |
| Sensitivity | 103dB |
| Frequency range | 2000-20,000Hz |
| Recommended min. crossover (12 dB/oct) | 2200Hz |
| Nominal coverage angle | 80° Conical |
| Magnet type | Ceramic |
| Voice coil diameter | 25mm / 1in |
| Voice coil material | Copper |
| Diaphragm material | PETP film |
| Surround material | PETP film |
| Horn material | ABS |

## Mounting Information

| | |
|---|---|
| Overall depth | 85.5mm / 3.4in |
| Side (W x H) | 87mm x 87mm / 3.43in x 3.43in |
| Magnet depth | 26.3mm/1.04in |
| Cut-out diameter | 80mm / 3.15in |
| Mounting hole dimensions | 4.8mm / 0.19in |
| Number of mounting holes | 4 |
| Mounting hole PCD | 99mm / 3.9in |

## Frequency Response and Impedance Curves

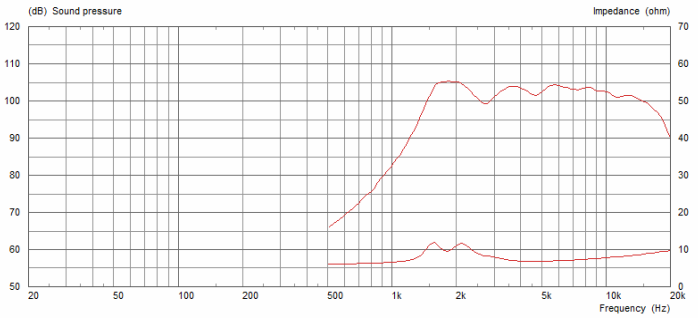


Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom