

CDX14-2410

1.4-inch exit ferrite magnet compression driver



- Maximum modal suppression phase plug
- Deep-drawn titanium diaphragm with polyimide surround
- 1,200Hz recommended min. crossover freq (12dB/oct)


General Specifications

Power Rating	50W
Continuous power rating	100W
Rated impedance	8&ohm
Sensitivity	106dB
Frequency range	800-20,000Hz
Recommended min. crossover	1200Hz
(12dB/oct)	
Magnet type	Ferrite
Voice coil diameter	60mm / 2.4in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Polyimide
Additional impedances	16Ω


Mounting Information

Width	145mm / 5.7in
Depth	70mm / 2.75in
Fitting	Bolt (4 x M6 holes on 102mm/4in PCD)
Throat exit	35mm / 1.4in
Unit weight	3.3kg / 7.2lb

Frequency Response and Impedance Curves

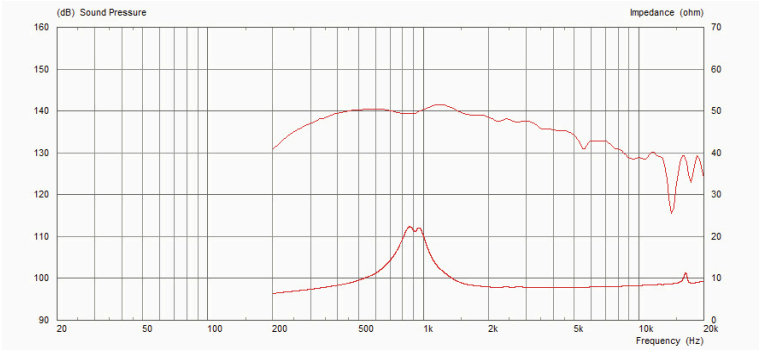

Measured - Plane Wave Tube

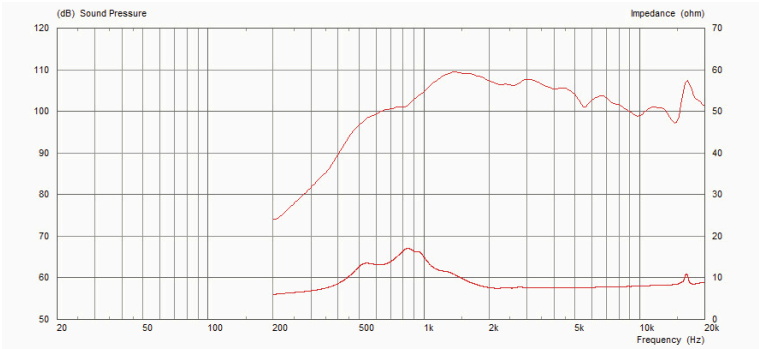

Measured - Exponential Horn 90° x 40° radiation pattern

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

Packed Dimensions & Weight

Single pack size W x D x H	170mm x 140mm x 75mm / 6.7in x 5.5in x 3in
Single pack weight	1.8kg / 3.9lb
Multi pack qty	6
Multi pack size W x D x H	500mm x 365mm x 90mm / 19.7in x 14.4in x 3.5in
Multi pack weight	11.5kg / 25.3lb

Repair kits

T6510	Diaphragm repair kit 8&oh
T5548	Diaphragm repair kit 16&ohm

