

## HF Compression Drivers

### CDX1-1745

1-inch exit ferrite magnet compression driver



- **Single piece PETP diaphragm and surround**
- **Sound Castle diaphragm assembly**
- **2,200Hz recommended min. crossover freq (12dB/oct)**
- **Bolt fitting**

### General Specifications

Power Rating	40W
Continuous power rating	80W
Rated impedance	8 $\Omega$
Sensitivity	110dB
Frequency range	1200-20,000Hz
Recommended min. crossover	2200Hz
(12dB/oct)	
Magnet type	Ferrite
Voice coil diameter	44mm / 1.75in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	PETP film
Surround material	PETP film
Additional impedances	16

### Mounting Information

Width	120mm / 4.7in
Depth	56mm / 2.2in
Fitting	Bolt (2/3 M6 holes on 76/57mm, 3.0/2.24in PCD)
Screw version	CDX1-1746
Throat exit	25mm / 1in
Unit weight	2.3kg / 5.1lb


## Frequency Response and Impedance curves

## Packed Dimensions & Weight


Single pack size W x D x H	140mm x 170mm x 70mm / 5.5in x 6.7in x 2.8in
Single pack weight	3kg / 6.6lb
Multi pack qty	6
Multi pack size W x D x H	430mm x 370mm x 90mm / 16.9in x 14.6in x 3.5in
Multi pack weight	14kg / 30.8lb

## Horns and repair kits

T5510	Diaphragm repair kit 8 $\Omega$
T5523	Diaphragm repair kit 16 $\Omega$
T5359	H19040P Horn
T5134	H17050 No Bell Horn

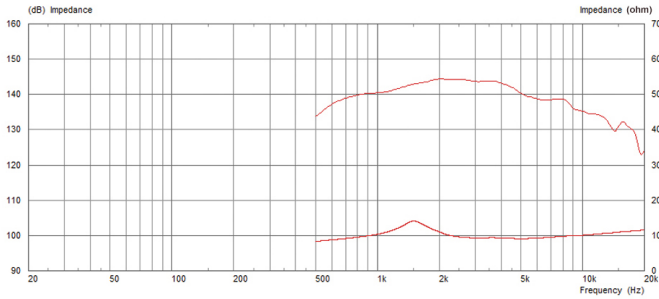

Measured - Plane Wave Tube

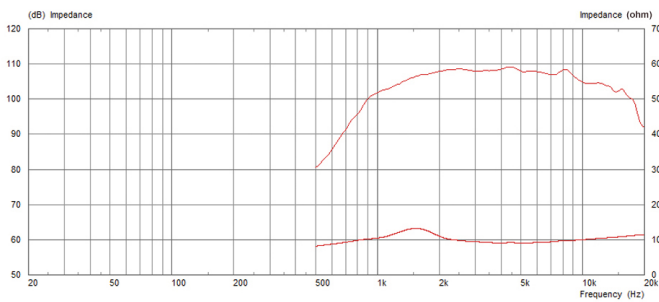

Measured - Exponential Horn 90° x 40° radiation pattern

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2 anechoic environment.