

### CDX1-1440

1-inch exit ferrite magnet compression driver



- Single piece Titanium diaphragm and surround
- Integrated diaphragm and rear cover for ease of replacement
- 2,200Hz recommended min. crossover freq (12dB/oct)


### General Specifications

Power Rating	25W
Continuous power rating	50W
Rated impedance	8 $\Omega$
Sensitivity	106dB
Frequency range	1500-20,000Hz
Recommended min. crossover	2200Hz
(12dB/oct)	
Magnet type	Ferrite
Voice coil diameter	35mm / 1.4in
Voice coil material	Copper clad aluminium
Diaphragm material	Titanium
Surround material	Titanium


### Mounting Information

Width	90mm / 3.5in
Depth	46.5mm / 1.8in
Fitting	Bolt (4 x M6 holes on 76mm/3in PCD)
Throat exit	25mm / 1in
Unit weight	1.0kg / 2.2lb

Frequency Response and Impedance Curves

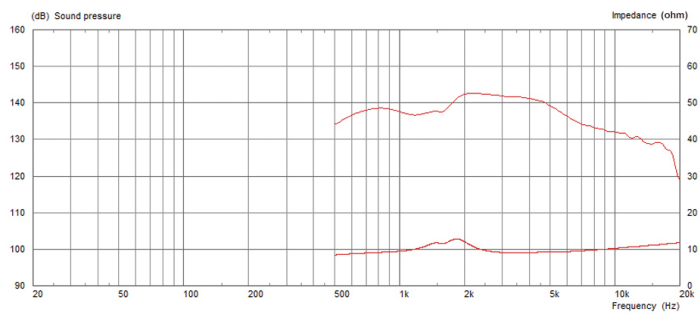

Measured - Plane Wave Tube

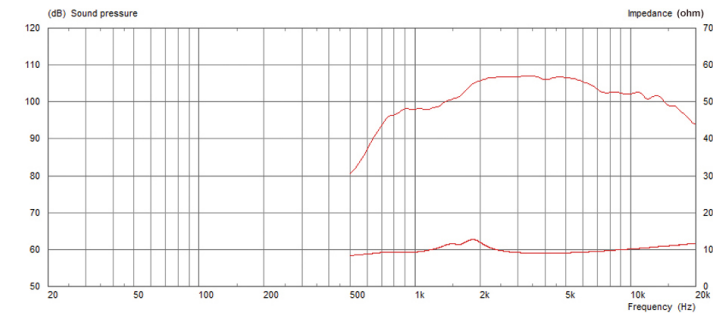

Measured - Exponential Horn 90° x 40° radiation pattern

**Power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

Packed Dimensions & Weight

Multi pack qty	16
Multi pack size W x D x H	495mm x 495mm x 90mm / 19.5in x 19.5in x 3.5in
Multi pack weight	17kg / 37.4lb

Horns and repair kits

T5580	Diaphragm repair kit 8 Ω
T5359	H19040P Horn
T5134	H17050 No Bell Horn

