

CDX20-3075 (Legacy)

2-inch exit ferrite magnet compression driver



- 800Hz recommended min. crossover freq (12dB/oct)
- Maximum modal suppression phase plug
- Deep-drawn titanium diaphragm with polyimide surround


General Specifications

Power Rating	75W
Continuous power rating	150W
Rated impedance	8&ohm
Sensitivity	107dB
Frequency range	500-18,000Hz
Recommended min. crossover	800Hz
(12dB/oct)	
Magnet type	Ferrite
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Polyimide


Mounting Information

Width	180mm / 7.0in
Depth	71mm / 2.8in
Fitting	Bolt (4 x M6 holes on a 102mm/4in PCD)
Throat exit	50mm / 2in
Unit weight	4.8kg / 10.6lb

Frequency Response and Impedance Curves

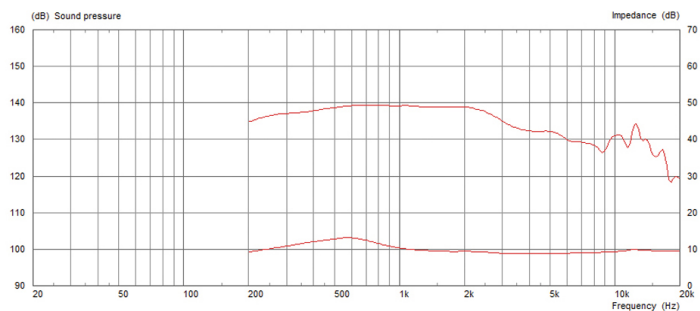

Measured - Plane Wave Tube

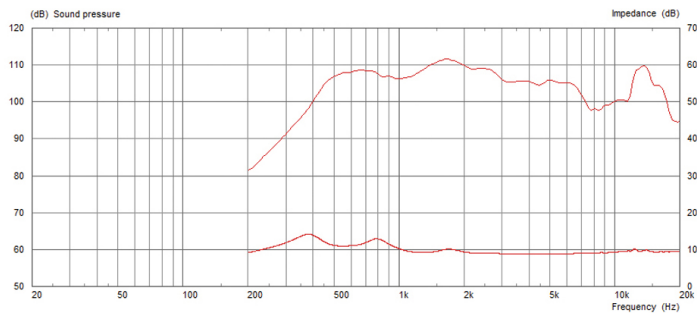

Measured - Exponential Horn 90° x 40° radiation pattern

**Power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

Packed Dimensions & Weight

Single pack size W x D x H      214mm x 196mm x 82mm  
/ 8.4in x 7.7in x 3.2in  
Single pack weight      5.1kg / 11.2lb

Repair kits

T5526      Diaphragm repair kit 8 Ω

