

# CELESTION

## LF Loudspeakers

### TF0615

6.5-inch pressed steel chassis, ferrite magnet  
mid/bass driver

**200W**

Continuous  
power rating

**95dB**

sensitivity

**1.5in**


Round copper  
voice coil



#### Mounting Information

Overall diameter	178mm / 7.01in
Overall depth	74mm / 2.9in
Cut-out diameter	147mm / 5.79in
Mounting hole dimensions	4.3mm / 0.17in
Number of mounting holes	4
Mounting hole PCD	168.5mm / 6.63in
Unit weight	1.4kg / 3.1lb

#### Frequency Response and Impedance Curves

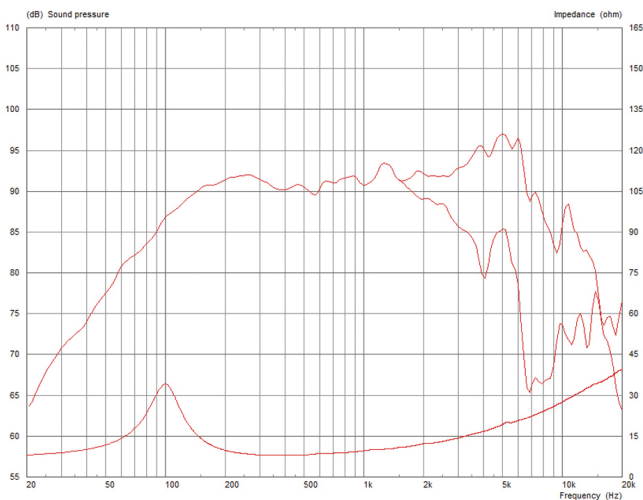

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2? anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

**Xmax:**  $0.5 \cdot (H_{vc} - H_g) + 0.25 \cdot H_g$

#### General Specifications

Nominal Diameter	160mm / 6.5in
Power Rating	100W
Continuous power rating	200W
EIA power rating	150W
Rated impedance	8 ohm
Sensitivity	95dB
Frequency range	85-6000Hz
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	0.48kg / 17oz
Voice coil diameter	38mm / 1.5in
Voice coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	6mm / 0.24in
VC winding height (Hvc)	6.5mm / 0.26in

#### Parameters

Sd	153.94cm <sup>2</sup> / 23.86in <sup>2</sup>
Fs	104.70Hz
Mms	12.09g / 0.43oz
Qms	3.949
Qes	0.719
Qts	0.608
Re	7.08 ohm
Vas	6.41l / 0.23ft <sup>3</sup>
Bl	8.85Tm
Cms	0.19mm/N
Rms	2.01kg/s
Le (at 1kHz)	0.47mH
Xmax	1.75mm / 0.07in

#### Packed Dimensions & Weight

Single pack size W x D x H	190mm x 200mm x 90mm / x 7.5in 7.9in x 3.5in
Single pack weight	2.0kg / 4.4lb

# CELESTION

Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom