CELESTION

Coaxial Loudspeakers

TFX0615








- Silk dome tweeter
- Integrated HF waveguide
- 110° nominal HF coverage

Frequency Response and Impedance Curves

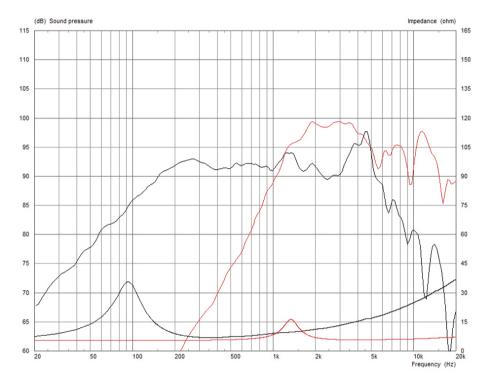

Black: LF response curve | Red: HF response curve

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Loudspeaker tested in free air.

HF power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power

calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Xmax: 0.5*(Hvc-Hg) + 0.25*Hg

Suggested crossover design available online at celestion.com/speakerworld

General Specifications

Nominal Diameter 165mm / 6.5in **Power Rating** 150W 300W Continuous power rating Rated impedance 8Ω Sensitivity 94dB Frequency range 100-6000Hz Chassis type Pressed steel **Ferrite** Magnet type Magnet weight 0.81kg / 23oz Voice coil diameter 38mm / 1.5in Voice coil material Round copper Former material Polyimide

Cone material Kevlar loaded paper
Surround material Cloth-sealed

Suspension Single

 $\begin{array}{ll} \text{Xmax} & 5.25 \text{mm} \, / \, 0.21 \text{in} \\ \text{Gap height (Hg)} & 6 \text{mm} \, / \, 0.24 \text{in} \\ \text{VC winding height (Hvc)} & 13.5 \text{mm} \, / \, 0.53 \text{in} \\ \end{array}$

Mounting Information

Overall diameter 178mm / 7in
Overall depth 75.5mm / 3in
Cut-out diameter 145mm / 5.7in
Mounting hole dimensions 4mm / 0.16in

Number of mounting holes 4

Mounting hole PCD 168.5mm / 6.63in
Unit weight 4.6lb / 2.1kg

Parameters

Sd 153.94cm2 / 23.86in2

Fs 96.80Hz Mms 12.62g / 0.45oz

 $\begin{array}{ccc} \text{Qms} & & & & & & & \\ \text{Qes} & & & & & & \\ \text{Qts} & & & & & \\ \text{Qts} & & & & & \\ \text{Qts} & & & & & \\ \text{Re} & & & & & \\ \text{Vas} & & & & & \\ \text{Vas} & & & & \\ \text{Si} & & & & & \\ \text{Cms} & & & & \\ \end{array}$

Xmax 5.25mm / 0.21in

2.53kg/s

0.46mH

Additional HF Specifications

Power rating10WContinuous power rating20WRated impedance8 ΩSensitivity98dB

Frequency range 1700-20,000Hz

Recommended min. crossove 2200Hz

r 12dB/oct

Rms

Le (at 1kHz)

Voice coil diameter 25mm / 1in Magnet type Neodymium

Diaphragm material Silk
Surround material Silk

Packed Dimensions & Weight

Multi pack qty 36

Multi pack size W x D x H 742mm x 541mm x 300mm / 29.2in

x 21.3in x 11.8in

Multi pack weight 80kg / 176lb



Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom