


### TF0615MR



#### Features

- 6" mid-range driver providing 97dB sensitivity and 50Wrms (AES standard) power handling
- 1.5" high temperature copper voice coil wound on polyimide former for increased reliability
- Very compact model suitable for use in 3-way systems
- Optimised to deliver detailed reproduction of mid-range frequencies
- Closed back chassis simplifies cabinet manufacture, eliminating need for separate mid-range enclosure

#### 8 Frequency Response

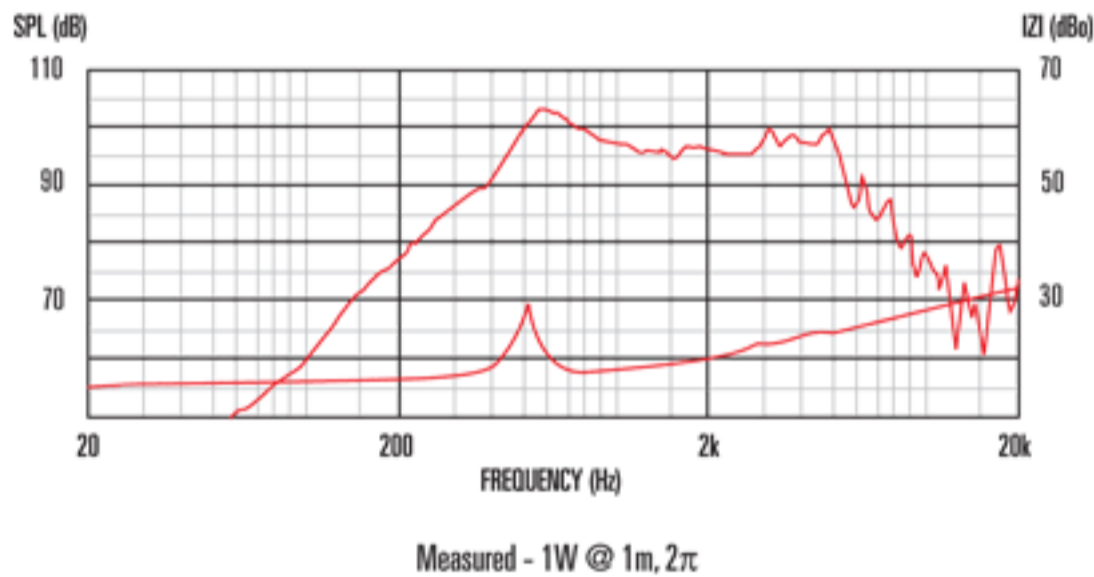

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Measured on axis at 1W, 1m in 2 anechoic environment.

#### General Specifications

Chassis type	Pressed steel
Coil material	Round copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Frequency range	500-5000Hz
Magnet type	Ferrite
Magnet weight	0.48kg/17oz
Nominal diameter	152mm/6in
Nominal impedance	8
Power rating <sup>1</sup>	50Wrms
Sensitivity <sup>2</sup>	97dB
Surround material	Treated paper
Suspension	Single
Voice coil diameter	38mm/1.5in

#### Small Signal Parameters

F <sub>s</sub>	500Hz
R <sub>e</sub>	5.7
L <sub>e</sub> (at 1kHz)	0.27mH

#### Mounting Information

Cut-out diameter	147mm/5.79in
Diameter	178mm/7.01in
Mounting PCD range	168.5mm/6.63in
Mounting slot dimensions	Ø 4.3mm/0.17in
Number of mounting slots	4
Overall depth	74mm/2.91in
Unit weight	1.4kg/3.1lb

#### Packed Dimensions & Weight

Multipack (140) size W x D x H	1070mmx850mmx860mm /42.1in x 33.5in x 33.9in
Multipack (140) weight	295kg/650lb
Single pack size W x D x H	190mm x 200mm x 90mm /7.5in x 7.9in x 3.5in
Single pack weight	2kg/4.4lb