


### TF0410MR



#### Features

- 4" mid-range driver providing 90dB sensitivity and 30Wrms (AES standard) power handling
- 1" high temperature copper voice coil wound on polyimide former for increased reliability
- Very compact model suitable for use in 3-way systems
- Optimised to deliver detailed reproduction of mid-range frequencies
- Closed back chassis simplifies cabinet manufacture, eliminating need for separate mid-range enclosure

#### 8 Frequency Response

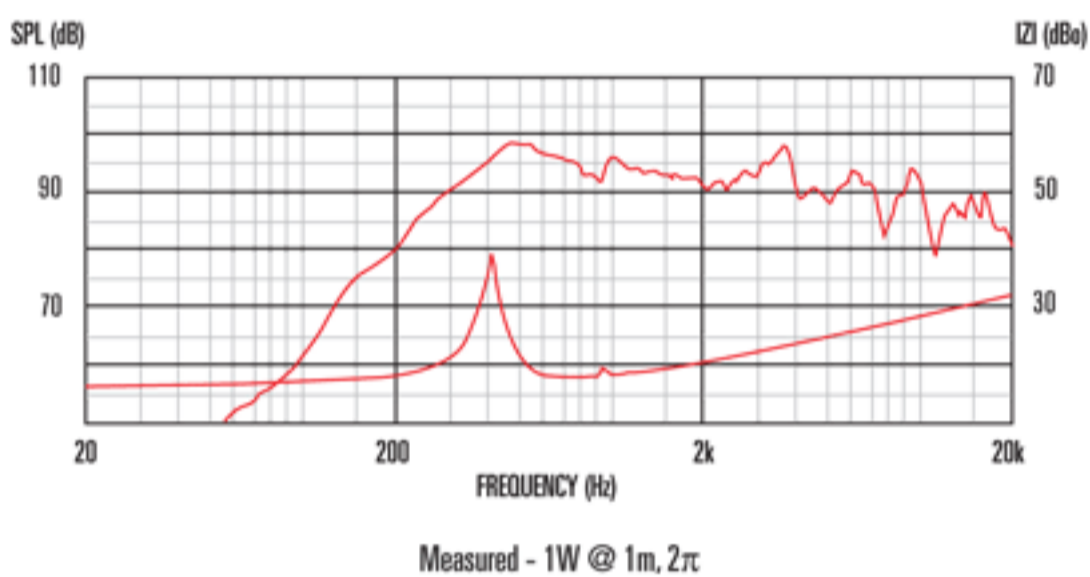

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Measured on axis at 1W, 1m in 2 anechoic environment.

#### General Specifications

|                           |                     |
|---------------------------|---------------------|
| Chassis type              | Pressed steel       |
| Coil material             | Round copper        |
| Cone material             | Kevlar loaded paper |
| Former material           | Polyimide           |
| Frequency range           | 400-4000Hz          |
| Magnet type               | Ferrite             |
| Magnet weight             | 0.48kg/17oz         |
| Nominal diameter          | 100mm/4in           |
| Nominal impedance         | 8                   |
| Power rating <sup>1</sup> | 30Wrms              |
| Sensitivity <sup>2</sup>  | 90dB                |
| Surround material         | Treated paper       |
| Suspension                | Single              |
| Voice coil diameter       | 25mm/1in            |

#### Small Signal Parameters

|    |       |
|----|-------|
| Fs | 400Hz |
| Re | 5.65  |

#### Mounting Information

|                          |                               |
|--------------------------|-------------------------------|
| Cut-out diameter         | 95mm/3.7in                    |
| Diameter                 | 120mm x 108.5mm/4.7in x 4.3in |
| Mounting PCD range       | 109mm/4.3in                   |
| Mounting slot dimensions | Ø 4.3mm/0.17in                |
| Number of mounting slots | 4                             |
| Overall depth            | 60mm/2.4in                    |
| Unit weight              | 1.2kg/2.6lb                   |

#### Packed Dimensions & Weight

|                               |   |
|-------------------------------|---|
| Multi pack (12) weight        | 20kg/44lb                                     |
| Multipack (12) size W x D x H | 425mmx280mmx165mm<br>/16.7in x 11.0in x 6.5in |