


### H1-7050 'NoBell';

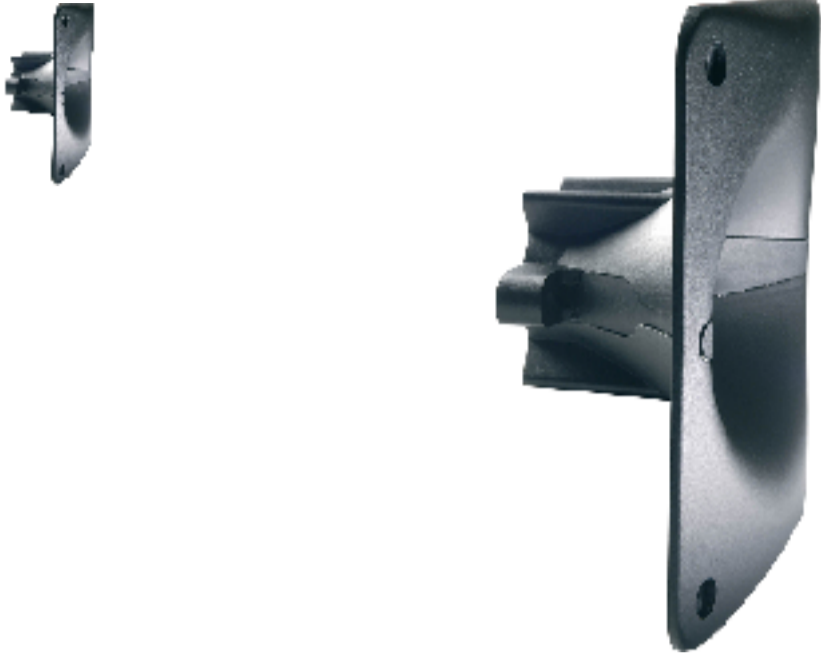

- Cast aluminium horn flare with 1" throat exit • Compatible for use with bolt (flange) fitted compression drivers only • Features embedded elastomer side panels that make it acoustically inert • Exponential horn flare with 70 x 50 radiation pattern • 1.5kHz cut-off frequency

### General Specifications

Horn type	Exponential
Radiation pattern	70° x 50°
Horn material	Cast Aluminium
Baffle cut-out	55mm/6.1in
Driver mounting detail	2 M6 holes on 76mm/3in PCD
Throat exit	25.4mm/1in.
Height	180mm/7.1in
Width	180mm/7.1in
Depth	90mm/3.5in
Weight	0.7kg/1.5lb

### Packed Dimensions & Weight

Single pack size W x D x H	190mm x 190mm x 65mm /7.5in x 7.5in x 2.6in
Single pack weight	1.0kg/3.3lb
Multi pack size W x D x H	390mm x 390mm x 560mm /15.4in x 15.4in x 22in
Multi pack weight	18kg/39.6lb