



CDX14-3030



Features

- 1.4" exit, ferrite magnet, 3" voice coil compression driver provides 75Wrms (AES standard) power handling and 106.5dB sensitivity
- Next generation Sound Castle™ soft clamping assembly reduces diaphragm stress for decreased distortion and even greater reliability of performance
- One piece titanium diaphragm and surround
- Finite Element Analysis (FEA) used to optimise both magnet assembly and acoustic design

8 Frequency Response

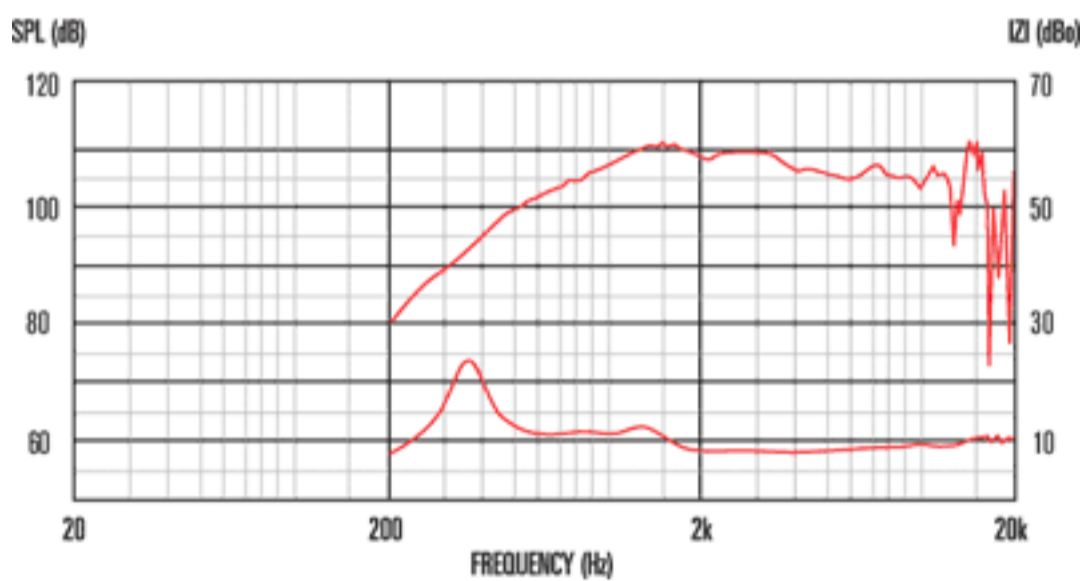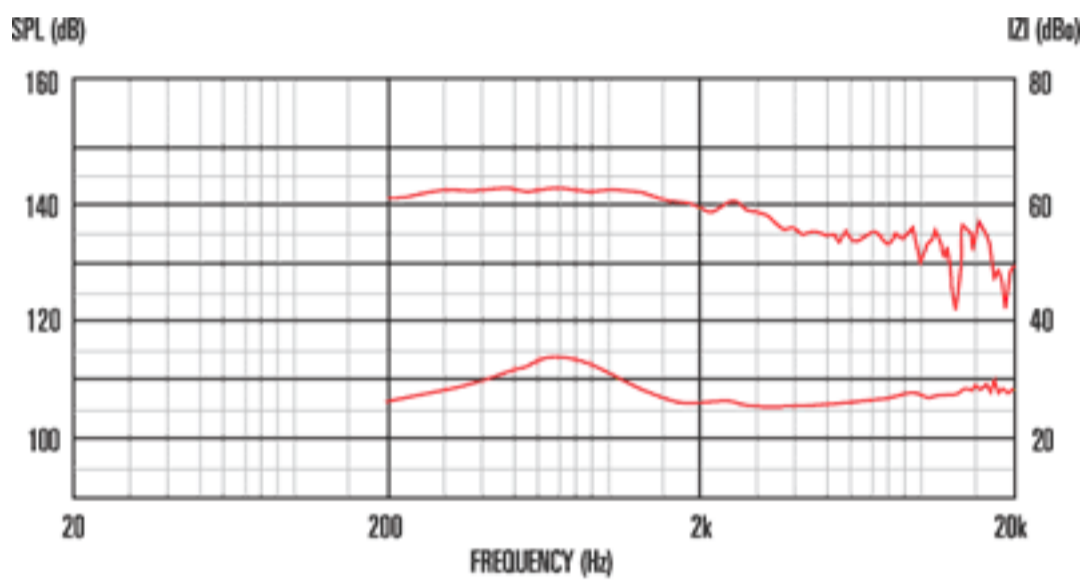

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Measured on axis at 1W, 1m, using typical horn, in 2 anechoic environment.

General Specifications

Power rating ¹	75Wrms
Nominal impedance	8
Frequency range	500-18,000
Sensitivity ²	106.5dB
Recommended min. crossover (12dB/oct)	1000Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite

Mounting Information

Overall width	180mm/7in
Overall depth	68mm/2.7in
Fitting	Flange (4 x M6 holes on a 102mm /4in PCD)
Throat exit	35.6mm/1.4in
Unit weight	4.88kg/10.7lb