


### PULSE10



With its robust steel-chassis, PULSE10, provides a rock-solid bass performance whether alone in a single speaker combo, in a 4x10 or even an 8x10 cab. Expect a tight, punchy low end with a warm mid-range that's full of presence, bringing focus and articulation to your playing. This heavy-duty driver truly delivers bass you can feel as well as hear.

#### 8 Frequency Response

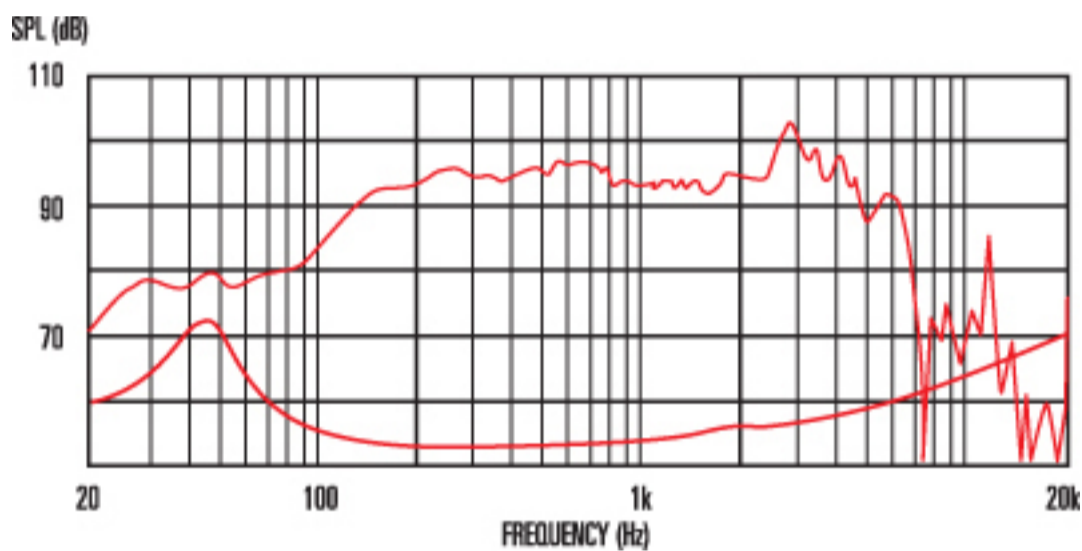

#### General Specifications

Nominal diameter	10", 254mm
Power rating	200W
Nominal impedance	8
Sensitivity	94dB
Magnet type	Ferrite
Voice coil diameter	2", 50.8mm
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	45-3500Hz
Xmax	0.15", 4mm
Gap depth	0.31", 8mm
Voice coil winding width	0.62", 16mm

#### Small Signal Parameters

D	0.21m/8.3in
Fs	68Hz
Mms	32.9g/1.16oz
Qms	2.54
Qes	0.53
Mmd	29.26g/1.03oz
Qts	0.44
Re	6.03Ω
Vas	25.8lt/0.91cu.ft.
Bl	12.88Tm
Cms	0.15mm/N
Rms	5.79kg/s
Le (at 1kHz)	0.92mH

#### Mounting Information

Cut-out diameter	9", 229mm
Diameter	10.1", 256mm
Mounting slot dimensions	0.24x0.31", 6x8mm &#216;
Mounting slot PCD	9.6", 245mm
Number of mounting slots	4
Overall depth	4.3", 110mm
Unit weight	6.6lb, 3kg