

BN15-300X





Not every player wants a super-clean, high-fidelity bass sound.

Characterised by an extended low end and greater linear excursion, Green Label speakers push out every note with a rich, warm tone and a powerful low-end thump.

Available with Ferrite or Neodymium magnets, Green Label speakers are primed for high-powered rock performances, where a full-bodied, warm, defined tone is essential.

8 Frequency Response

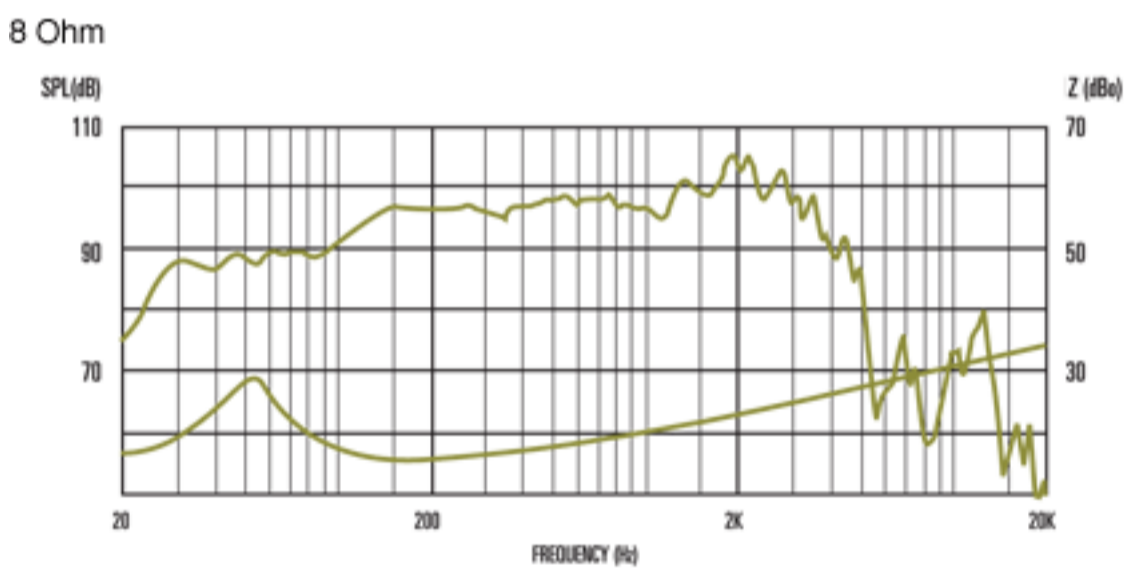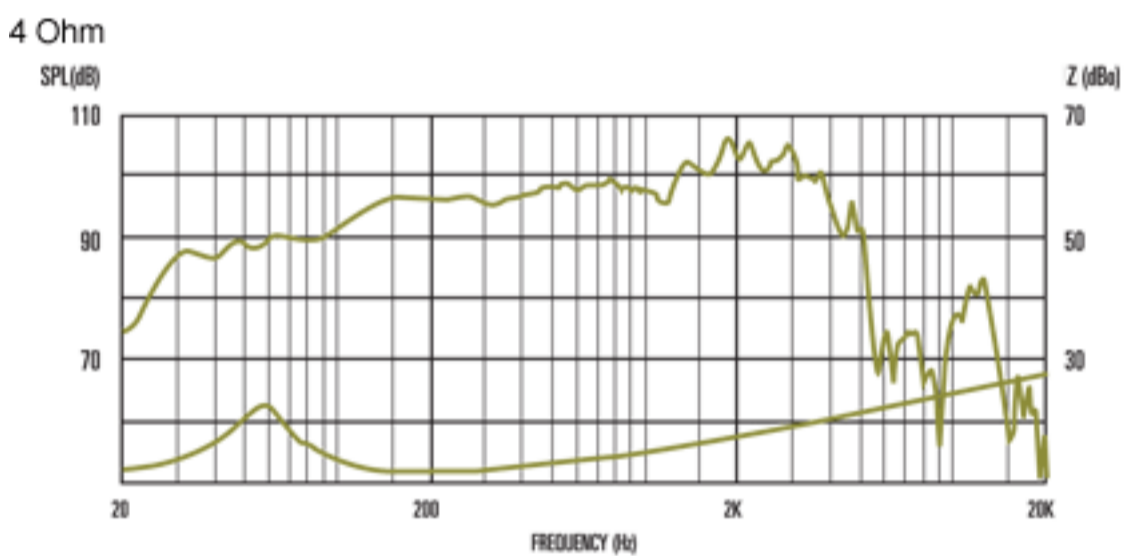

General Specifications

Nominal diameter	381mm/15in
Power rating	300Wrms
Nominal impedance	Available 4 or 8
Sensitivity	96dB
Magnet type	Neodymium
Voice coil diameter	63.5mm/2.5in
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	42-3500Hz
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.33m/12.99in
Fs	57.80Hz
Mair	14.15g/0.499oz
Mmd	65.22g/2.3oz
Qms	0.10
Qes	1.10
Qts	0.89
Re	3.19
Vas	98.73lt/3.49ft ³
Bl	9.13Tm
Cms	0.10mm/N
Rms	6.42kg/s
Le (at 1kHz)	0.39mH

Mounting Information

Cut-out diameter	351mm/13.8in
Diameter	385mm/15.2in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Mounting slot PCD	369mm/14.5in
Number of mounting slots	8
Overall depth	152mm/6in
Unit weight	2.3kg/5.1lb