## **CELESTION**

# **Coaxial Loudspeakers**

## **TFX0515**








- Silk dome tweeter
- 100° nominal HF coverage

#### **Frequency Response and Impedance Curves**

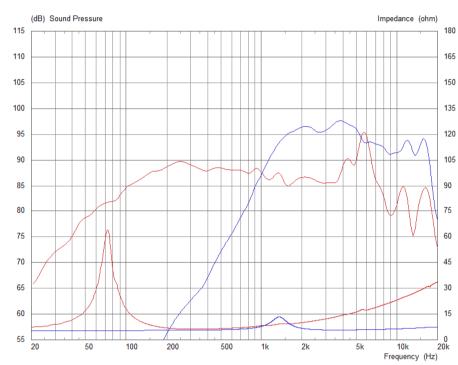

Red: LF response curve | Blue: HF response curve

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

HF power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Powe calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Xmax: 0.5\*(Hvc-Hg) + 0.25\*Hg

Suggested crossover design available online at celestion.com/speakerworld

#### **General Specifications**

**Nominal Diameter** 125mm / 5in **Power Rating** 150W 300W Continuous power rating Rated impedance  $8\Omega$ Sensitivity 89dB 80-4000Hz Frequency range Chassis type Pressed steel Magnet type **Ferrite** Magnet weight 0.65kg / 23oz Voice coil diameter 38mm / 1.5in Voice coil material Round copper Former material Polyimide

Cone material Kevlar loaded paper

Surround material Elastomer Suspension Single

Xmax 3.75mm / 0.14in
Gap height (Hg) 6mm / 0.24in
VC winding height (Hvc) 10.5mm / 0.41in

### **Mounting Information**

Overall diameter 136x151mm / 5.4x5.9in

Overall depth 72mm / 2.8in
Cut-out diameter 116mm / 4.6in
Mounting hole dimensions 4.5mm / 0.18in

Number of mounting holes 4

Mounting hole PCD 140mm / 5.5in
Unit weight 1.6kg / 3.5lb

#### **Parameters**

Sd 95cm2 / 14.72in2

Fs 74Hz

Mms 9.073g / 0.32oz

Qms 8.293 Qes 0.503 Qts 0.474 Re 577Ω 6.53I / 0.23ft3 Vas Bi 6.96Tm Cms 0.509mm/N 0.509kg/s Rms 0.363mH Le (at 1kHz) 3.75mm / 0.14in Xmax

### **Additional HF Specifications**

Power rating 10W Continuous power rating 20W Rated impedance  $8 \Omega$  Sensitivity 96dB

Frequency range 1400-20,000Hz

Recommended min. crossove 2200Hz

r 12dB/oct

Voice coil diameter 25mm / 1in Magnet type Neodymium

Diaphragm material Silk
Surround material Silk

### **Packed Dimensions & Weight**

Single pack size W x D x 200mm x 220mm x 125mmm / 7.9in

H x 8.7in x 4.9in

Single pack weight 2.2kg / 4.85lb

Multi pack qty 30

Multi pack size W x D x H 750mm x 290mm x 310mm / 29.5in

x 11.4in x 12.2in

Multi pack weight 50kg / 110lb

### CELESTION

Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom