



# TEN

2

BY CELESTION





**TEN<sup>2</sup>**  
BY CELESTION

---


## Consistently superior performance.

The result of a specialist development program within Celestion's UK-based R&D facility, Ten Squared (Ten<sup>2</sup>) is a range of low frequency pro audio drivers, designed and engineered without compromise to deliver consistently superior levels of performance in the most demanding professional sound reinforcement applications, even after hundreds of hours of use.

# Ten Key Features


## That add up to a new standard in LF driver performance

The Ten<sup>2</sup> development program revisited every detail of driver design, developing and testing a series of incremental improvements that combine to redefine standards of performance and durability in professional low frequency loudspeakers.




### Precision Tuned Venting

Precision Tuned Venting (PTV) harnesses the cooling effects of constant airflow in a set of precisely dimensioned vents, enabling cooling around the coil and magnet assembly to be significantly improved - by up to 30C compared to conventional designs.




### Custom Voice Coil Structure

Celestion winds its own voice coils using proprietary adhesion and voice coil structure solutions to maximise product lifespan and performance longevity.




### Reduced Power Compression

Highly efficient PTV cooling delivers additional reduction in power compression (loss of driver efficiency), as well as lower thermal stress on the voice coil, leading to improved performance, endurance and longevity.




### Enhanced Moisture Protection

A water-resistant coating is applied to one or both sides of the loudspeaker's cone (depending on speaker model and desired application). This significantly improves the driver's ability to resist direct exposure to water and higher levels of humidity, and also improves product durability.




### Polysiloxane Laminated Dual Suspension

Polysiloxane (a silicone polymer) is sandwiched between two resin-impregnated layers which enables the laminated suspension to be worked much harder without losing stiffness, giving better coil control, making DC shift less likely and increasing speaker longevity.




### Laser-Cauterized Lead Out Wire Holes

Weaving lead out wires into the suspension through laser cut holes reduces 'whipping' and lessens the fatigue on wires and joints caused by high power and cone excursion.




### Reconfigured Magnet Assembly For Greater Excursion

A re-configured magnet assembly allows much greater cone excursion before damage occurs (X<sub>mech</sub>) and best-in-class X<sub>protection</sub> figures (the distance the coil and cone move, measured to the point where both BL and C<sub>ms</sub> have both reduced to 30% of their resting value).



### Multi-layer Inside/Outside Coil Windings

Celestion's voice coils are wound inside/outside in multiple layers, to maximise cooling potential with the greatest amount of surface area exposed to free air. This further contributes to the reduction of both power compression and thermal stress.



### Convergent Motor Strength & Mechanical Compliance

Electrical motor strength BL and mechanical compliance C<sub>ms</sub> reach their defined X<sub>protection</sub> limit at practically the same point: achieving a low distortion performance even during high excursion.



### Precision built in the UK

TSQ drivers are built on the newly-commissioned, robotically-assisted production line at Celestion's UK-based loudspeaker research and manufacturing facility, and rigorously tested in line with an exacting list of performance criteria.



# TSQ1230

12-inch cast aluminium chassis  
neodymium magnet low frequency  
loudspeaker

**1400W**  
continuous power  
rating

**98dB**  
sensitivity

**3-inch**  
copper clad  
aluminium voice coil



### General Specifications

Nominal diameter	305mm / 12in
Power rating <sup>1</sup>	700W
Continuous power rating <sup>2</sup>	1400W
Rated impedance	8Ω
Sensitivity <sup>3</sup>	98dB
Frequency range	50-3,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	75mm / 3in
Voice coil material	Copper clad aluminium
Former material	Glass Fibre
Cone material	Glass loaded cellulose
Surround material	Triple roll, cloth sealed
Suspension	Single
Gap height (H <sub>g</sub> )	10mm / 0.39in
VC winding height (H <sub>vc</sub> )	18.5mm / 0.73in

### Mounting Information

Overall diameter	315mm / 12.4in
Overall depth	140.5mm / 5.53in
Cut-out diameter	282mm / 11.1in
Mounting hole dimensions	10x6.5mm / 0.39x0.26in
Number of mounting holes	8
Mounting hole PCD	294-300mm / 11.6-11.8in
Flange & gasket thickness	10.4mm / 0.41in
Unit weight	4.9kg / 10.8lb


### Parameters<sup>4</sup>

Sd	530.93cm <sup>2</sup> / 82.29in <sup>2</sup>
Fs	55Hz
Mms	66.4g / 2.34oz
Qms	8.163
Qes	0.35
Qts	0.336
Re	5.3Ω
Vas	51.63l / 1.8ft <sup>3</sup>
Bl	18.6Tm
Cms	0.129mm/N
Rms	2.775kg/s
Le (at 1kHz)	0.762mH
Xmax <sup>5</sup>	6.75mm / 0.27in
Xmech <sup>6</sup>	32mm / 1.26in


### Packed Dimensions & Weights

Single pack size (WxDxH)	350mm x 350mm x 180mm
Single pack weight	13.8in x 13.8in x 7.1in 5.8kg / 12.8lb


### Frequency response and impedance

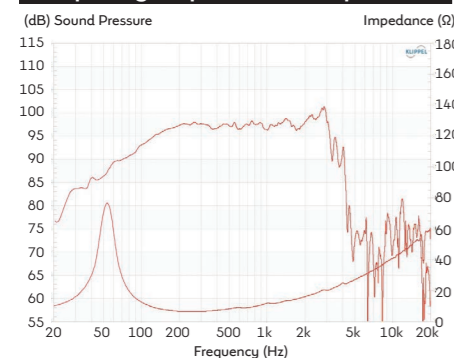

### Force factor (Bl) symmetry

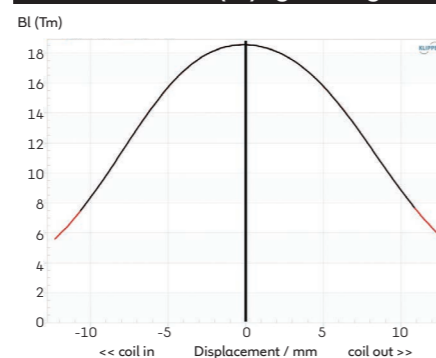

### Stiffness (K) symmetry

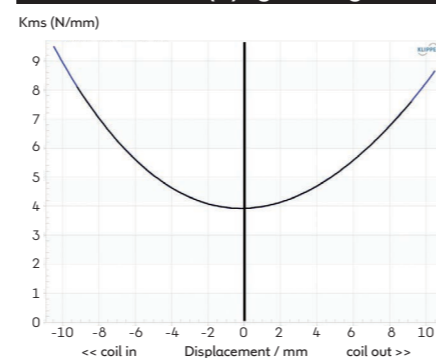

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5\*(Hvc-Hg) + 0.25\*Hg. 6. Maximum peak-to-peak excursion before damage.



# TSQ1535

15-inch cast aluminium chassis  
neodymium magnet low frequency  
loudspeaker

**1800W**  
continuous power  
rating

**98.5dB**  
sensitivity

**3.5-inch**  
copper clad  
aluminium voice coil



### General Specifications

Nominal diameter	381mm / 15in
Power rating <sup>1</sup>	900W
Continuous power rating <sup>2</sup>	1800W
Rated impedance	8Ω
Sensitivity <sup>3</sup>	98.5dB
Frequency range	45-3,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	90mm / 3.5in
Voice coil material	Copper clad aluminium
Former material	Glass Fibre
Cone material	Glass loaded cellulose
Surround material	Triple roll, cloth sealed
Suspension	Single
Gap height (H <sub>g</sub> )	10mm / 0.39in
VC winding height (H <sub>vc</sub> )	21mm / 0.83in

### Mounting Information

Overall diameter	393mm / 15.4in
Overall depth	173.5mm / 6.83in
Cut-out diameter	354mm / 13.9in
Mounting hole dimensions	10x7mm / 0.39x0.28in
Number of mounting holes	8
Mounting hole PCD	367-374mm / 14.4-14.72in
Flange & gasket thickness	11.9mm / 0.47in
Unit weight	5.7kg / 12.6lb


### Parameters<sup>4</sup>

Sd	855.3cm <sup>2</sup> / 33.7in <sup>2</sup>
Fs	55Hz
Mms	111.7g / 3.94oz
Qms	7.710
Qes	0.497
Qts	0.467
Re	5.00Ω
Vas	77.9l / 2.75ft <sup>3</sup>
Bl	19.7Tm
Cms	0.075mm/N
Rms	5.00kg/s
Le (at 1kHz)	0.88mH
Xmax <sup>5</sup>	8.0mm / 0.31in
Xmech <sup>6</sup>	44mm / 1.73in


### Packed Dimensions & Weights

Single pack size (WxDxH)	435mm x 435mm x 200mm
Single pack weight	17.1in x 17.1in x 7.9in 7kg / 15.4lb


### Frequency response and impedance

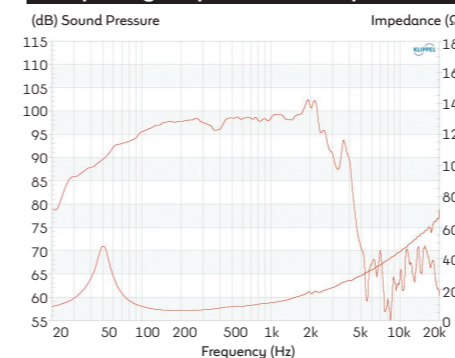

### Force factor (Bl) symmetry

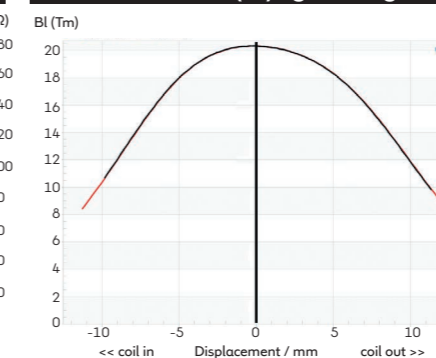

### Stiffness (K) symmetry

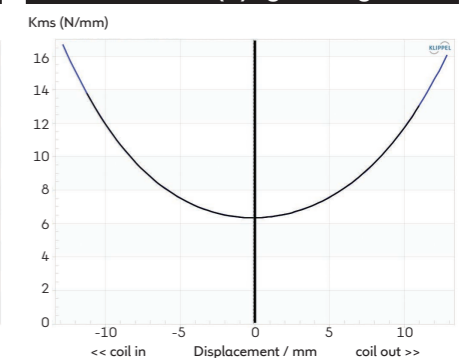

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5\*(Hvc-Hg) + 0.25\*Hg. 6. Maximum peak-to-peak excursion before damage.



# TSQ1845

18-inch cast aluminium chassis  
neodymium magnet low frequency  
loudspeaker

**3600W** continuous power rating  
**96.5dB** sensitivity  
**4.5-inch** round copper voice coil



### General Specifications

Nominal diameter	457mm / 18in
Power rating <sup>1</sup>	1800W
Continuous power rating <sup>2</sup>	3600W
Rated impedance	8Ω
Sensitivity <sup>3</sup>	96.5dB
Frequency range	30-1,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	115mm / 4.5in
Voice coil material	Round copper
Former material	Glass Fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Dual, polysiloxane-laminated
Gap height (H <sub>g</sub> )	12mm / 0.46in
VC winding height (H <sub>v</sub> )	36mm / 1.42in

### Mounting Information

Overall diameter	460mm / 18.1in
Overall depth	235mm / 9.5in
Cut-out diameter	414mm / 16.29in
Mounting hole dimensions	7x11mm / 0.28x0.43in
Number of mounting holes	8
Mounting hole PCD	432-441mm / 17.04-17.36in
Flange & gasket thickness	17mm / 0.67in
Unit weight	11.8kg / 26lb

Also available in 4Ω


### Parameters<sup>4</sup>

Sd	1134cm <sup>2</sup> / 175.8in <sup>2</sup>
Fs	35Hz
Mms	316g / 11.18oz
Qms	8.712
Qes	0.300
Qts	0.290
Re	5.0Ω
Vas	119.3l / 4.21ft <sup>3</sup>
Bl	33.8Tm
Cms	0.065mm/N
Rms	7.99kg/s
Le (at 1kHz)	3.06mH
Xmax <sup>5</sup>	15mm / 0.47in
Xmech <sup>6</sup>	80mm / 3.14in
Efficiency η <sub>0</sub>	1.8%


### Packed Dimensions & Weights

Single pack size (WxDxH)	500mm x 500mm x 280mm 19in x 19in x 11in
Single pack weight	12.3kg / 27.1lb


### Frequency response and impedance

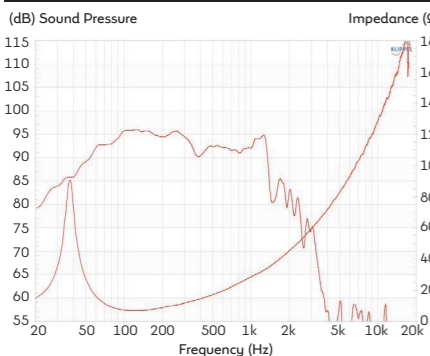

### Force factor (Bl) symmetry

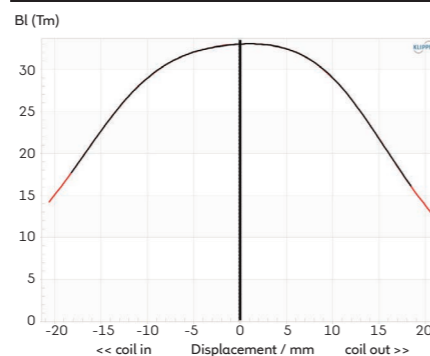

### Stiffness (K) symmetry

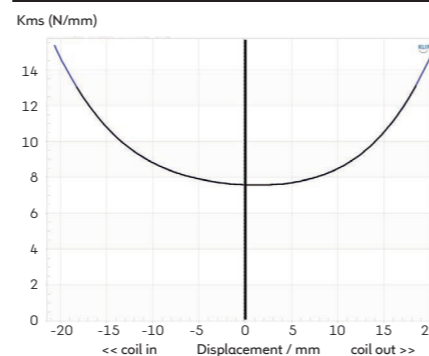

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5\*(Hvc-Hg) + 0.25\*Hg. 6. Maximum peak-to-peak excursion before damage.



# TSQ2145

21-inch cast aluminium chassis  
neodymium magnet low frequency  
loudspeaker

**3600W** continuous power rating  
**97dB** sensitivity  
**4.5-inch** round copper voice coil



### General Specifications

Nominal diameter	530mm / 21in
Power rating <sup>1</sup>	1800W
Continuous power rating <sup>2</sup>	3600W
Rated impedance	8Ω
Sensitivity <sup>3</sup>	97dB
Frequency range	30-1,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	115mm / 4.5in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Triple, polysiloxane-laminated
Gap height (H <sub>g</sub> )	12mm / 0.46in
VC winding height (H <sub>v</sub> )	36mm / 1.42in

### Mounting Information

Overall diameter	547mm / 21.5in
Overall depth	255mm / 10.04in
Cut-out diameter	508mm / 20in
Mounting hole dimensions	8.5x10mm / 0.33x0.39in
Number of mounting holes	8
Mounting hole PCD	525-528mm / 20.61-20.79in
Flange & gasket thickness	19.3mm / 0.76in
Unit weight	13.8kg / 30.4lb

Also available in 4Ω


### Parameters<sup>4</sup>

Sd	1661.9cm <sup>2</sup> / 257.9in <sup>2</sup>
Fs	30Hz
Mms	435.2g / 15.35oz
Qms	8.393
Qes	0.359
Qts	0.344
Re	5.0Ω
Vas	253.8l / 8.96ft <sup>3</sup>
Bl	33.8Tm
Cms	0.065mm/N
Rms	9.77kg/s
Le (at 1kHz)	3.91mH
Xmax <sup>5</sup>	15mm / 0.46in
Xmech <sup>6</sup>	80mm / 3.14in
Efficiency η <sub>0</sub>	1.9%


### Packed Dimensions & Weights

Single pack size (WxDxH)	575mm x 575mm x 280mm 22.6in x 22.6in x 11in
Single pack weight	14.5kg / 32lb


### Frequency response and impedance

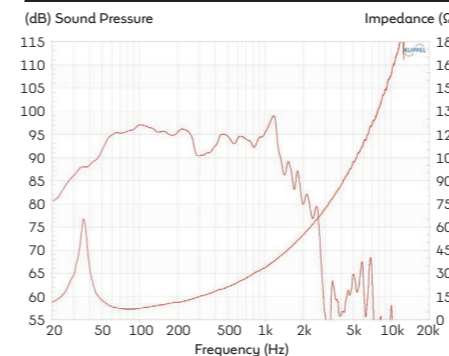

### Force factor (Bl) symmetry

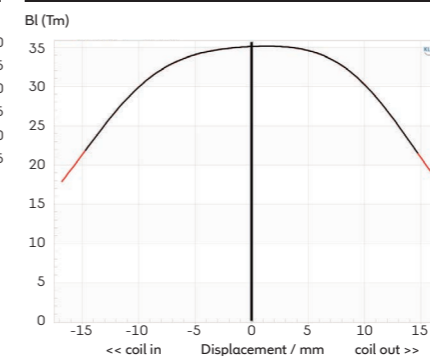

### Stiffness (K) symmetry

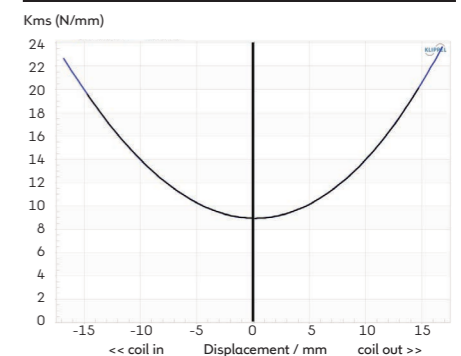

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5\*(Hvc-Hg) + 0.25\*Hg. 6. Maximum peak-to-peak excursion before damage.

# TSQ2460

24-inch cast aluminium chassis  
neodymium magnet low frequency  
loudspeaker

**5000W**  
continuous power  
rating

**98dB**  
sensitivity

**6-inch**  
round copper  
voice coil



## General Specifications

Nominal diameter	610mm / 24in
Power rating <sup>1</sup>	2500W
Continuous power rating <sup>2</sup>	5000W
Rated impedance	4Ω
Sensitivity <sup>3</sup>	98dB
Frequency range	20-200Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	152mm / 6in
Voice coil material	Round copper
Former material	Glass Fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Triple, polysiloxane-laminated
Gap height (H <sub>g</sub> )	15mm / 0.59in
VC winding height (H <sub>vc</sub> )	45mm / 1.77in

## Mounting Information

Overall diameter	627mm / 24.7in
Overall depth	281mm / 11in
Cut-out diameter	571mm / 22.5in
Mounting hole dimensions	8.5x9mm / 0.33x0.35in
Number of mounting holes	8
Mounting hole PCD	596.3-606mm / 23.47-23.86in
Flange & gasket thickness	21mm / 0.83in
Unit weight	22kg / 48lb

Also available in 8Ω

## Preliminary Information


### Parameters<sup>4</sup>

Sd	2239cm <sup>2</sup> / 347in <sup>2</sup>
Fs	29.9Hz
Mms	712g / 25.12oz
Qms	9.70
Qes	0.32
Qts	0.31
Re	3.10Ω
Vas	282l / 9.96ft <sup>3</sup>
Bl	36.0Tm
Cms	0.040mm/N
Rms	13.80kg/s
Le (at 1kHz)	2.1mH
Xmax <sup>5</sup>	18.75mm / 0.73in
Xmech <sup>6</sup>	71mm / 2.8in
Efficiency η <sub>0</sub>	2.3%


### Packed Dimensions & Weights

Single pack size (WxDxH)	740mm x 740mm x 375mm
	29.13in x 29.13in x 14.76in
Single pack weight	25kg / 55lb


### Frequency response and impedance\*

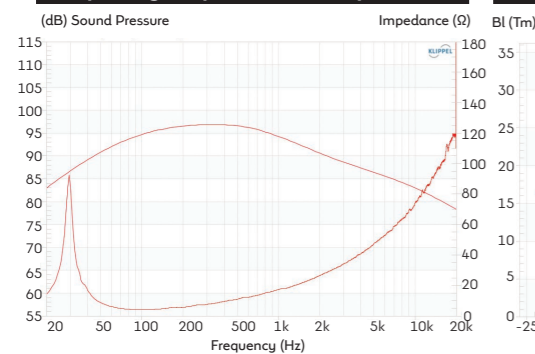

### Force factor (Bl) symmetry

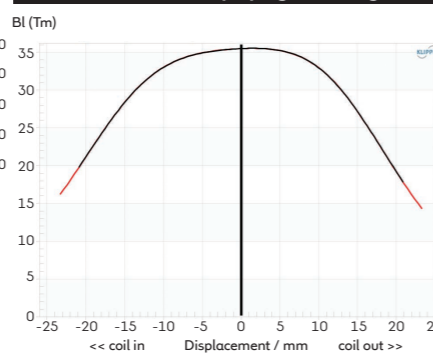

### Stiffness (K) symmetry

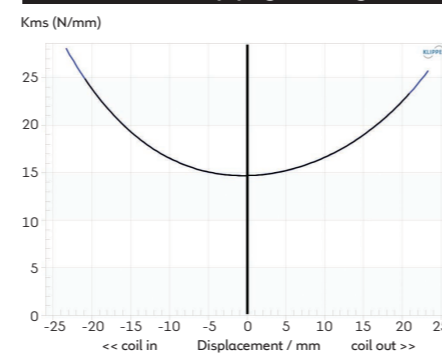

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5\*(Hvc-Hg) + 0.25\*Hg. 6. Maximum peak-to-peak excursion before damage. \*Simulated data



**CELESTION**



[celestion.com](http://celestion.com)

Please note that Celestion adopt a progressive policy and we reserve the right to alter drive unit specifications and/or appearance without prior notice. E&OE  
LIT0715/0125