

## 10-inch cast aluminium chassis, neodymium magnet mid/bass driver

- Inverted dustcap for closer positioning of phase plug
- Balanced Airflow Venting provides enhanced cooling

**500W**

Continuous power rating

**99dB**

sensitivity

**2.5in**


Copper clad aluminium coil voice



#### Packed Dimensions & Weight

Multi pack qty	80
Multi pack size W x D x H	970mm x 1070mm x 850mm / 38.1in x 42.1in x 33.4in
Multi pack weight	257kg / 565lb

#### Frequency Response and Impedance Curves

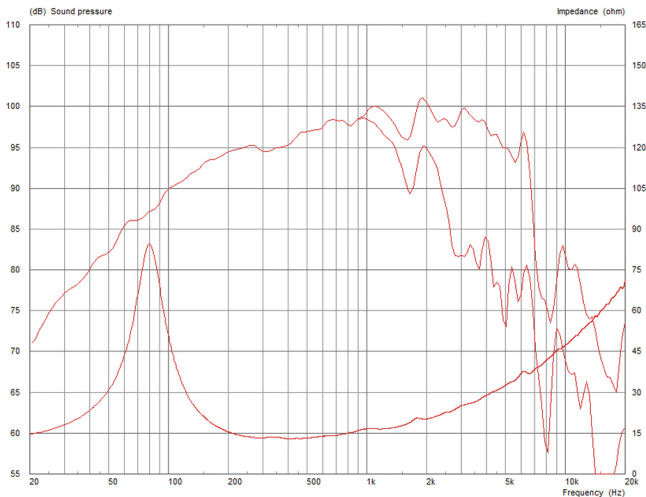

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2? anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

**Xmax:** Hvc-Hg/2

#### General Specifications

Nominal Diameter	254mm / 10in
Power Rating	250W
Continuous power rating	500W
Rated impedance	16 ohm
Sensitivity	99dB
Frequency range	60-5000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	64mm / 2.5in
Voice coil material	Copper clad aluminium
Former material	Glass fibre
Cone material	Treated paper
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	12.2mm / 0.49in

#### Mounting Information

Overall diameter	265mm / 10.4in
Overall depth	119mm / 4.7in
Cut-out diameter	233mm / 9.2in
Mounting hole dimensions	8x6.5mm / 0.3x0.25in
Number of mounting holes	8
Mounting hole PCD	244.5-247mm / 9.63-9.73in
Unit weight	2.96kg / 6.5lb

#### Parameters

Sd	346.36cm <sup>2</sup> / 53.69in <sup>2</sup>
Fs	79.50Hz
Mms	31.45g / 1.11oz
Qms	3.27
Qes	0.409
Qts	0.364
Re	10.76 ohm
Vas	21.65l / 0.75ft <sup>3</sup>
Bl	20.31Tm
Cms	0.13mm/N
Rms	4.81kg/s
Le (at 1kHz)	0.75mH
Xmax	2.1mm / 0.08in