

**CELESTION****LF Loudspeakers****TSQ1845****Mounting Information**

Overall diameter	460mm / 18.1in
Overall depth	235mm / 9.5in
Cut-out diameter	416mm / 16.29in
Mounting hole dimensions	7x11mm / 0.28x0.43in
Number of mounting holes	8
Mounting hole PCD	432-441mm / 17.04-17.36in
Flange & gasket thickness	17mm / 0.67in
Unit weight	11.8kg / 26lb

**Packed Dimensions & Weight**

Single pack size W x D x H	500mm x 500mm x 280mm / x 19in 19in x 11in
Single pack weight	12.3kg / 27.1lb

**18-inch cast aluminium chassis neodymium magnet low frequency loudspeaker**

- Advanced temperature control using 3-channel tuned venting system provides highly efficient cooling across the frequency band
- Voice coil typically operates at up to 80°C lower temperature than other leading drivers in this class
- Polysiloxane laminated double suspension provides much greater stability and improved cone displacement symmetry
- Lead-out wires precision woven into suspension minimises excess motion and reduces fatigue
- Double-sided, weatherproof cone coating enhances durability

**3600W**

Continuous power rating

**96.5dB**

sensitivity

**4.5in**

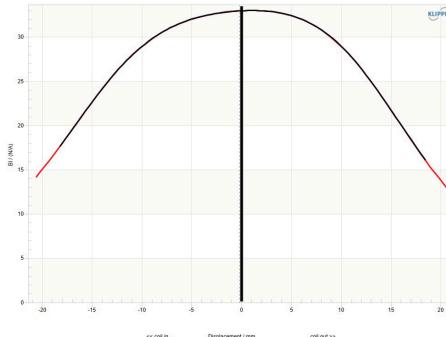
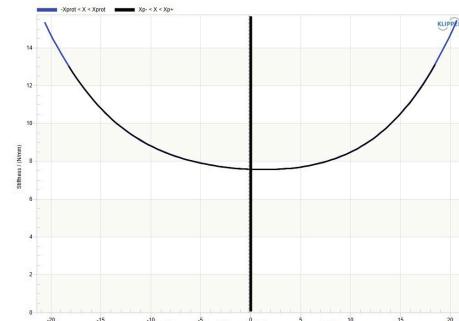
Round copper voice coil

**General Specifications**

Nominal Diameter	457mm / 18in
Power Rating	1800W
Continuous power rating	3600W
Rated impedance	4, 8 ohm
Sensitivity	96.5dB
Frequency range	30-1,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	115mm / 4.5in
Voice coil material	Round copper
Former material	Glass Fibre
Cone material	Glass loaded cellulose, & water-resistant coating front back
Surround material	Triple roll, cloth sealed
Suspension	Dual, polysiloxane-laminated
Gap height (Hg)	12mm / 0.46in
VC winding height (Hvc)	36mm / 1.42in

**Parameters**

Sd	1134cm <sup>2</sup> / 175.8in <sup>2</sup>
Fs	35Hz
Mms	316g / 11.18oz
Qms	8.712
Qes	0.300
Qts	0.290
Re	5.0 ohm
Vas	119.3l / 4.21ft <sup>3</sup>
Bl	33.8Tm
Cms	0.065mm/N
Rms	7.99kg/s
Le (at 1kHz)	3.06mH
Xmax	15mm / 0.59in
Xmech	40mm / 1.57in
Efficiency	1.8%

**Frequency response and impedance****Force factor Bl symmetry****Stiffness K symmetry**

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2<sup>2</sup> anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

**Xmax:** 0.5\*(Hvc-Hg) + 0.25\*Hg

**Xmech:** Maximum peak-to-peak excursion before damage.

**CELESTION**