CELESTION

HF Compression Drivers

PULSE XL1.10 SUPERTWEETER

1-inch exit complete high frequency unit



The PULSE XL 1.10 Supertweeter delivers all the sweet treble you could possibly ask for. Featuring a reliable and efficient PETP diaphragm compression driver with integrated horn, it's perfect for bass guitar players who want to extend their frequency range for additional high-end attack.

35W
Continuous power rating

103dB
Sensitivity

1-inch
Copper voice coil


General Specifications

Power Rating	15W
Continuous power rating	35W
Rated impedance	8 ohm
Sensitivity	103dB
Frequency range	2000-20,000Hz
Recommended min. crossover (12 dB/oct)	2200Hz
Nominal coverage angle	80° Conical
Magnet type	Ceramic
Voice coil diameter	25mm / 1in
Voice coil material	Copper
Diaphragm material	PETP film
Surround material	PETP film
Horn material	ABS

Mounting Information

Overall depth	85.5mm / 3.4in
Side (W x H)	87mm x 87mm / 3.43in x 3.43in
Magnet depth	26.3mm/1.04in
Cut-out diameter	80mm / 3.15in
Mounting hole dimensions	4.8mm / 0.19in
Number of mounting holes	4
Mounting hole PCD	99mm / 3.9in

Frequency Response and Impedance Curves

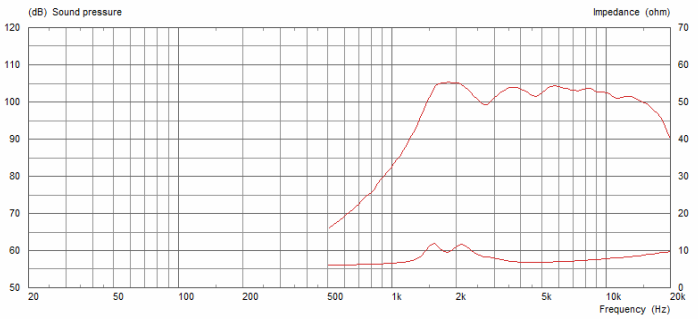

CELESTION

Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom