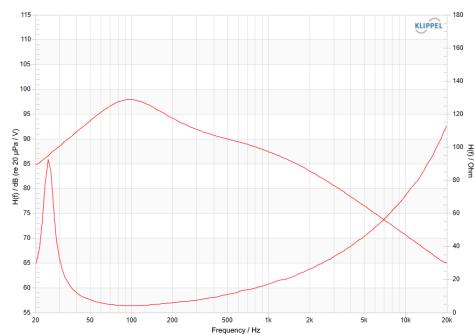
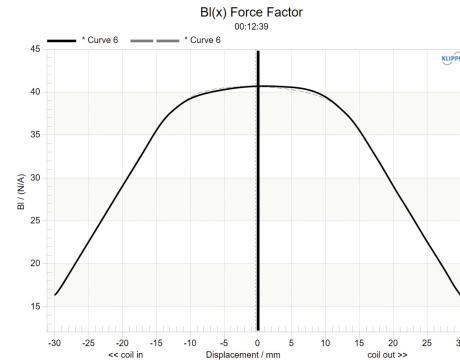
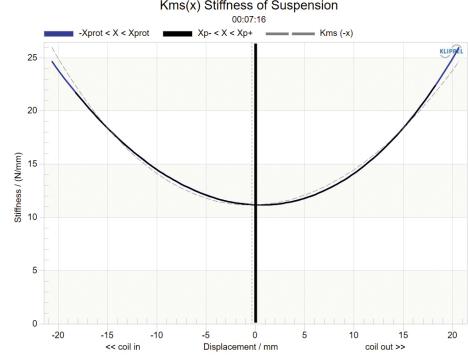


**CELESTION****LF Loudspeakers****TSQ2460****Mounting Information**

Overall diameter	627mm / 24.7in
Overall depth	280mm / 11in
Cut-out diameter	571mm / 22.5in
Mounting hole dimensions	8.5x9mm / 0.33x0.35in
Number of mounting holes	8
Mounting hole PCD	596.3-606mm / 23.47-23.86in
Flange & gasket thickness	21mm / 0.83in
Unit weight	22kg / 48lb

**Packed Dimensions & Weight**

Single pack size W x D x H	745mm x 745mm x 415mm / x 29.3in 29.3in x 16.3in
Single pack weight	27kg / 59.5lb

**Frequency response and impedance****Force factor Bl symmetry****Stiffness K symmetry**

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2<sup>2</sup> anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal. 4 ohm parameters shown.

**Xmax:** 0.5\*(Hvc-Hg) + 0.25\*Hg

**Xmech:** Maximum peak-to-peak excursion before damage.

\* Simulated data

**24-inch cast aluminium chassis neodymium magnet low frequency loudspeaker**

- Advanced temperature control using 3-channel tuned venting system provides highly efficient cooling across the frequency band
- Voice coil typically operates at up to 80°C lower temperature than other leading drivers in this class
- Polysiloxane laminated double suspension provides much greater stability and improved cone displacement symmetry
- Lead-out wires precision woven into suspension minimises excess motion and reduces fatigue
- Double-sided, weatherproof cone coating enhances durability

**5000W**

Continuous power rating

**98dB**

sensitivity

**6in**

Round copper voice coil

**General Specifications**

Nominal Diameter	610mm / 24in
Power Rating	2500W
Continuous power rating	5000W
Rated impedance	4, 8 ohm
Sensitivity	98dB
Frequency range	20-200Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	152mm / 6in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded cellulose, & water-resistant coating front back
Surround material	Triple roll, cloth sealed
Suspension	Triple, polysiloxane-laminated
Gap height (Hg)	15mm / 0.59in
VC winding height (Hvc)	45mm / 1.77in

**Parameters**

Sd	2239cm <sup>2</sup> / 347in <sup>2</sup>
Fs	27Hz
Mms	717.2g / 25.3oz
Qms	10.89
Qes	0.312
Qts	0.303
Re	3.17 ohm
Vas	344.5l / 12.17ft <sup>3</sup>
Bl	35.23Tm
Cms	0.048mm/N
Rms	11.089kg/s
Le (at 1kHz)	2.05mH
Xmax	18.75mm / 0.73in
Xmech	74mm / 2.91in
Efficiency	2%

**CELESTION**