

HF Horns

H1-7050 'NO BELL'



Compression driver horn

- Compatible for use with bolt (flange) fitted compression drivers
- Features embedded elastomer side panels that make it acoustically inert

1in

Throat exit

70° x 50°

Radiation pattern

1.5kHz

Cut-off frequency

General Specifications

| | |
|-------------------|----------------|
| Horn type | Exponential |
| Horn material | Cast aluminium |
| Radiation pattern | 70° x 50° |
| Cut off frequency | 1.5kHz |


Mounting Information

| | |
|----------------|--------------------------------------|
| Height | 180mm / 7.1in |
| Width | 180mm / 7.1in |
| Depth | 90mm / 3.54in |
| Baffle cut-out | 155mm / 6.1in diameter |
| Fitting | Bolt (2xM6 holes on PCD) 76mm/3in |
| Throat exit | 25.1mm / 1in |
| Unit weight | 0.7kg / 1.5lb |

Packed Dimensions & Weight

| | |
|----------------------------|---|
| Single pack size W x D x H | 190mm x 190mm x 65mm / x 7.5in 7.5in x 2.6in |
| Single pack weight | 1.0kg / 2.2lb |
| Multi pack qty | 24 |
| Multi pack size W x D x H | 390mm x 390mm x 560mm / x 15.4in 15.4in x 22in |
| Multi pack weight | 18kg / 39.6lb |

Horizontal Polar

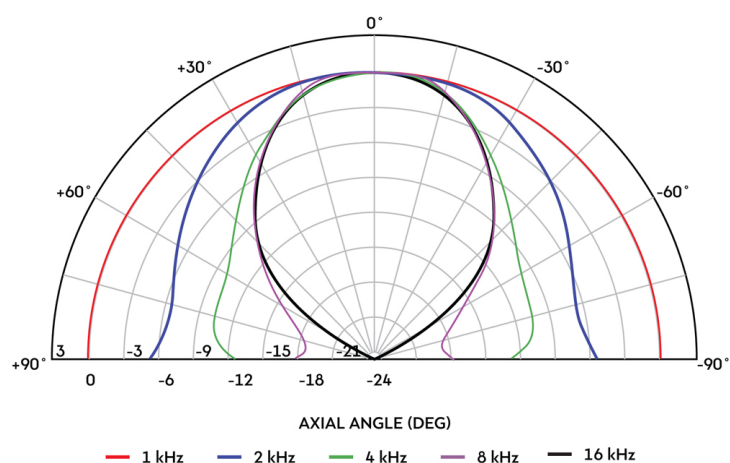

Vertical Polar

