Legacy Pro Audio

CDX14-3060

1.4-inch exit ferrite magnet compression driver

- 1,000Hz recommended min. crossover freq (12dB/oct)
- Maximum modal suppression phase plug
- Deep - drawn titanium diaphragm with ployimide surround

150W
Continuous power rating

106.5dB
Sensitivity

3in
Edgewound copper clad aluminium voice coil



General Specifications

Power Rating	75W
Continuous power rating	150W
Rated impedance	8 ohm
Sensitivity	106.5dB
Frequency range	500-18000Hz
Recommended min. crossover (12 dB/oct)	1000Hz
Magnet type	Ferrite
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Polyimide

Mounting Information

Width	180mm / 7.0in
Depth	71mm / 2.8in
Fitting	Bolt (4 x M6 holes on a 102mm/4in PCD)
Throat exit	35mm / 1.4in
Unit weight	4.9kg / 10.7lb


Repair kits


T5526	Diaphragm repair kit 8 ohm

Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm / 8.4in x 7.7in x 3.2in
Single pack weight	5.1kg / 11.2lb

Frequency Response and Impedance Curves

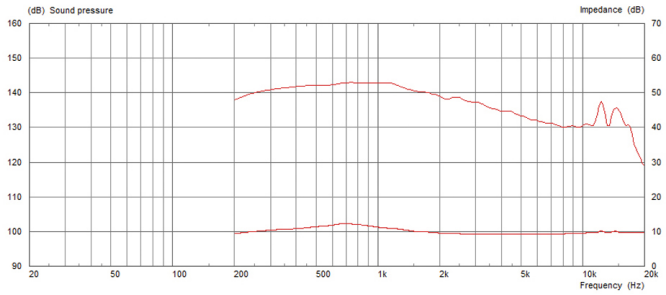

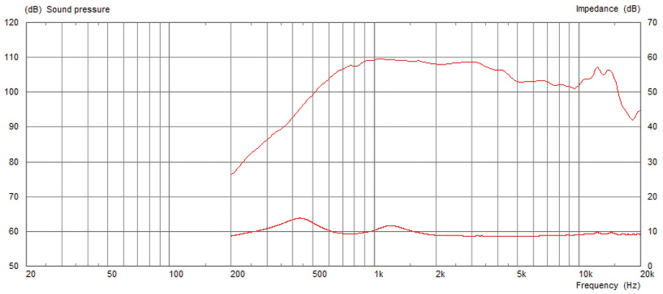

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
Continuous power rating: Defined as 3dB greater than the AES rating.
Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2? anechoic environment.

Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom