

Full Range Loudspeakers

K12H-200TC



12-inch pressed steel chassis, ferrite magnet extended HF response driver

- Secondary cone extends HF response to 10kHz
- Strengthened voice coil assembly for improved midband clarity

400W

Continuous power rating

98dB

sensitivity

2in

Round copper voice coil

General Specifications

| | |
|-------------------------|---------------------|
| Nominal Diameter | 305mm / 12in |
| Power Rating | 200W |
| Continuous power rating | 400W |
| Rated impedance | 8 ohm |
| Sensitivity | 98dB |
| Frequency range | 50-10,000Hz |
| Chassis type | Pressed steel |
| Magnet type | Ferrite |
| Magnet weight | 1.41kg / 50oz |
| Voice coil diameter | 50mm / 2in |
| Voice coil material | Round copper |
| Former material | Polyimide |
| Cone material | Kevlar loaded paper |
| Surround material | Cloth-sealed |
| Suspension | Single |
| Gap height (Hg) | 8mm / 0.31in |
| VC winding height (Hvc) | 12mm / 0.47in |

Mounting Information

| | |
|--------------------------|-----------------|
| Overall diameter | 309mm / 12.2in |
| Overall depth | 130.3mm / 5.1in |
| Cut-out diameter | 283mm / 11.14in |
| Mounting hole dimensions | 7.9mm / 0.31in |
| Number of mounting holes | 4 |
| Mounting hole PCD | 297mm / 11.69in |
| Unit weight | 8.6lb / 3.9kg |


Parameters

| | |
|--------------|--|
| Sd | 530.93cm ² / 82.29in ² |
| Fs | 62.30Hz |
| Mms | 40.57g / 1.43oz |
| Qms | 2.804 |
| Qes | 0.432 |
| Qts | 0.374 |
| Re | 5.81 ohm |
| Vas | 64.10l / 2.26ft ³ |
| Bl | 14.63Tm |
| Cms | 14.63mm/N |
| Rms | 5.67kg/s |
| Le (at 1kHz) | 0.63mH |
| Xmax | 4mm / 0.16in |

Packed Dimensions & Weight

| | |
|----------------------------|--|
| Single pack size W x D x H | 333mm x 332mm x 145mm / x 13.1in 12.7in x 5.7in |
| Single pack weight | 5.0kg / 11lb |

Frequency Response and Impedance curves

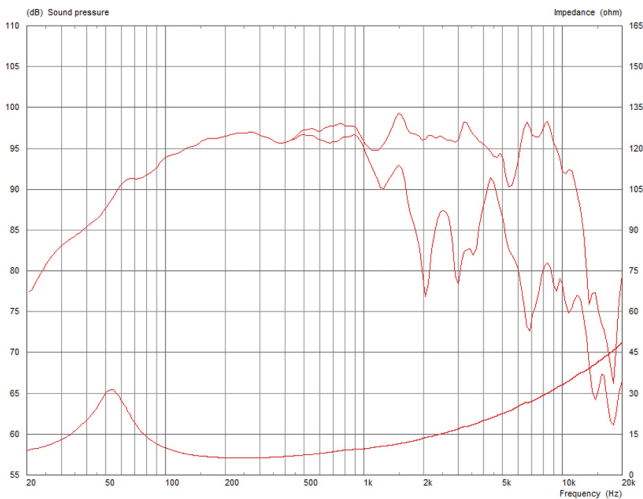

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2? anechoic environment.

Xmax: 0.5*(Hvc-Hg) + 0.25*Hg

Parameters: Measured after unit subjected to pre-conditioning signal.