

Full Range Loudspeakers

K12H-100TC

12-inch pressed steel chassis, ferrite magnet  
extended HF response driver

- Secondary cone extends HF response to 10kHz
- Strengthened voice coil assembly for improved midband clarity

200W

Continuous  
power rating

97dB

sensitivity

1.75in


Round copper  
voice coil



Packed Dimensions & Weight

Single pack size W x D x H	333mm x 332mm x 145mm / x 13.1in 12.7in x 5.7in
Single pack weight	4.8kg / 10.5

Frequency Response and Impedance curves

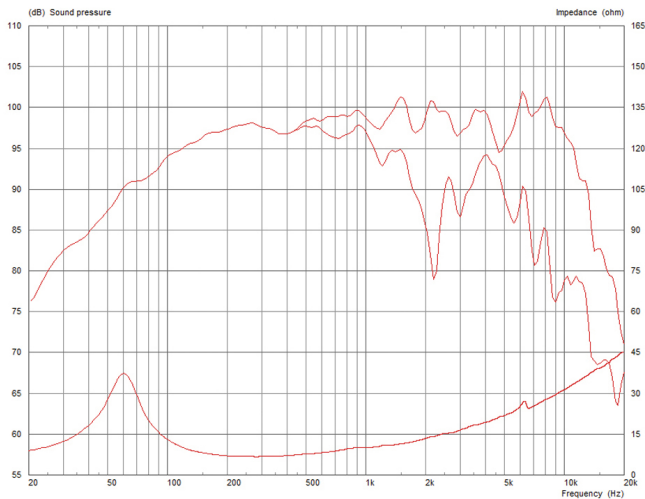

Power Rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.  
Continuous Power Rating is defined as 3dB greater than the AES rating.  
Sensitivity measured on axis at 1W, 1m in 2? anechoic environment.  
Xmax is derived from: (voice coil winding width-gap depth)/2.  
Small Signal Parameters are measured after unit subjected to pre-conditioning signal.

General Specifications

Nominal Diameter	305mm / 12in
Power Rating	100W
Continuous power rating	200W
Rated impedance	8 ohm
Sensitivity	97dB
Frequency range	50-10,000Hz
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	1.41kg / 50oz
Voice coil diameter	45mm / 1.75in
Voice coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	10mm / 0.39in

Mounting Information

Overall diameter	309mm / 12.2in
Overall depth	129.7mm / 5.1in
Cut-out diameter	283mm / 11.14in
Mounting hole dimensions	7.9mm / 0.31in
Number of mounting holes	4
Mounting hole PCD	297mm / 11.69in
Unit weight	3.8kg / 8.4lb

Parameters

Sd	530.93cm <sup>2</sup> / 82.29in <sup>2</sup>
Fs	55.60Hz
Mms	45.39g / 1.60oz
Qms	2.550
Qes	0.473
Qts	0.399
Re	5.48 ohm
Vas	72.04l / 2.54ft <sup>3</sup>
Bi	13.55Tm
Cms	0.18mm/N
Rms	6.22kg/s
Le (at 1kHz)	0.67mH
Xmax	3mm / 0.12in