

### TF1230S

12-inch, pressed steel chassis, ferrite magnet bass/mid driver



- Increased chassis diameter for compatibility with popular portable two-way reinforcement systems


### General Specifications

Nominal Diameter	305mm / 12in
Power Rating	300W
Continuous power rating	600W
EIA power rating	450W
Rated impedance	8 $\Omega$
Sensitivity	96dB
Frequency range	50-4000Hz
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	1.7kg / 60oz
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	17mm / 0.67in

### Mounting Information

Overall diameter	317.5mm / 12.5in
Overall depth	137mm / 5.4in
Cut-out diameter	283mm / 11.14in
Mounting hole dimensions	13x6.5mm / 0.51x0.26 in
Number of mounting holes	8
Mounting hole PCD	299mm / 11.77in
Unit weight	4.3kg / 9.5lb

## Frequency Response and Impedance Curves

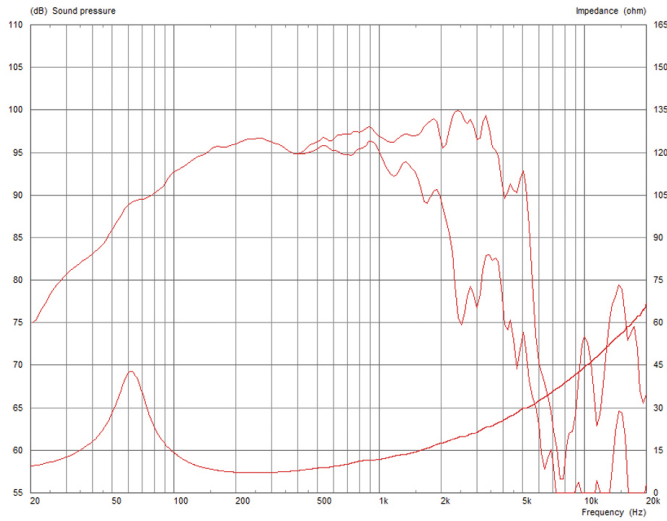

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Parameters: Measured after unit subjected to pre-conditioning signal.

Xmax: Hvc-Hg/2

## Parameters

Sd	530.93cm <sup>2</sup> / 82.29in <sup>2</sup>
Fs	60.30Hz
Mms	51.08g / 1.8oz
Qms	3.28
Qes	0.422
Qts	0.374
Re	5.98 Ω
Vas	54.41l / 1.92ft <sup>3</sup>
Bi	16.56Tm
Cms	0.14mm/N
Rms	5.91kg/s
Le (at 1kHz)	0.98mH
Xmax	4.5mm / 0.18in

## Packed Dimensions & Weight

Single pack size W x D x H	330mm x 330mm x 150mm / 13in x 13in x 5.9in
Single pack weight	5.5kg / 12.0lb

**CELESTION**