



CDX14-3030

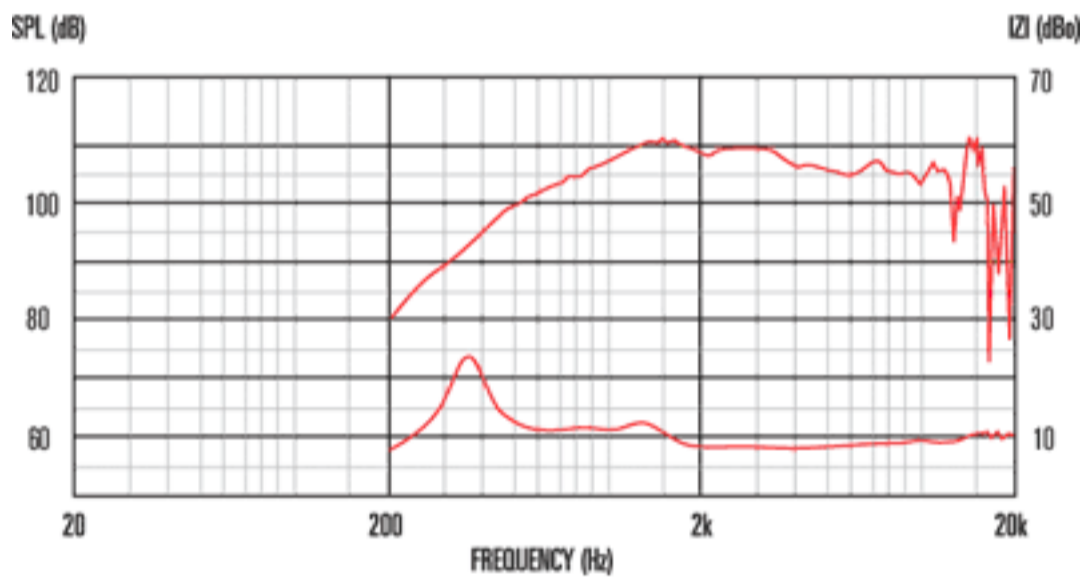

- 1.4" exit, ferrite magnet, 3" voice coil compression driver provides 75Wrms (AES standard) power handling and 106.5dB sensitivity
- Next generation Sound Castle™ soft clamping assembly reduces diaphragm stress for decreased distortion and even greater reliability of performance
- One piece titanium diaphragm and surround
- Finite Element Analysis (FEA) used to optimise both magnet assembly and acoustic design

8 Frequency Response

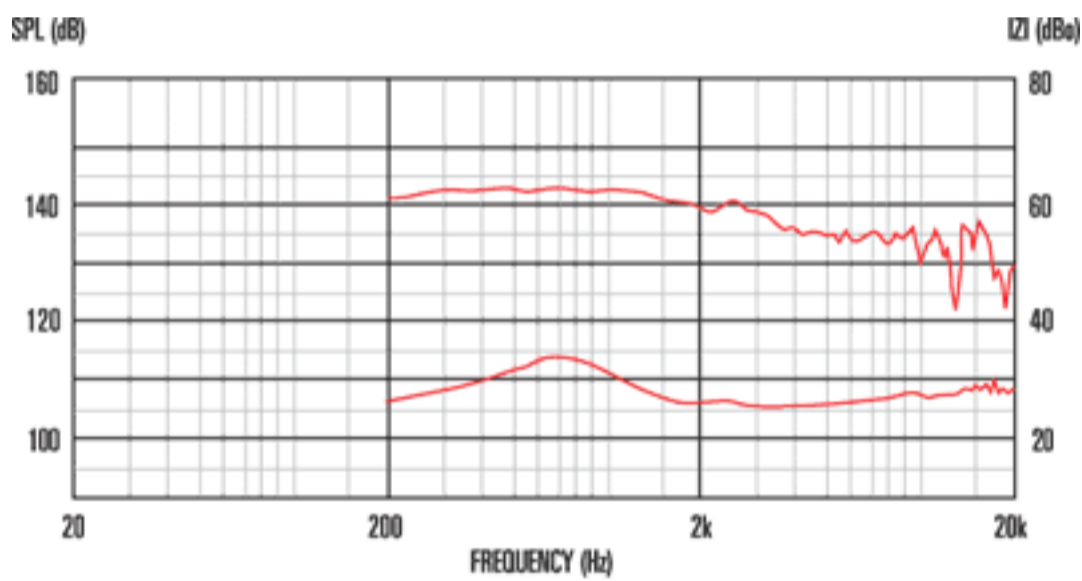

- 1.
2. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
3. Continuous Power Handling is defined as 3dB greater than the AES rating.
4. Measured on axis at 1W, 1m, using typical horn, in 2½ anechoic environment.

General Specifications

Power rating ¹	75Wrms
Continuous power rating ²	150W
Nominal impedance	8
Frequency range	500-18,000Hz
Sensitivity ³	106.5dB
Recommended min. crossover (12dB/oct)	1000Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Titanium

Mounting Information

Width	180mm/7in
Depth	68mm/2.7in
Weight	4.88kg/10.7lb
Fitting	Flange (4 x M6 holes on a 102mm /4in PCD)
Throat exit	35.6mm/1.4in

Packed Dimensions & Weight

Single pack size W x D x H	214mm x 196mm x 82mm /8.4in x 7.7in x 3.2in
Single pack weight	5.1kg/11.2lb
Multi pack size W x D x H	
Multi pack weight	