


### PULSE10



With its robust steel-chassis, PULSE10, provides a rock-solid bass performance whether alone in a single speaker combo, in a 4x10 or even an 8x10 cab. Expect a tight, punchy low end with a warm mid-range that's full of presence, bringing focus and articulation to your playing. This heavy-duty driver truly delivers bass you can feel as well as hear.

#### 8 Frequency Response

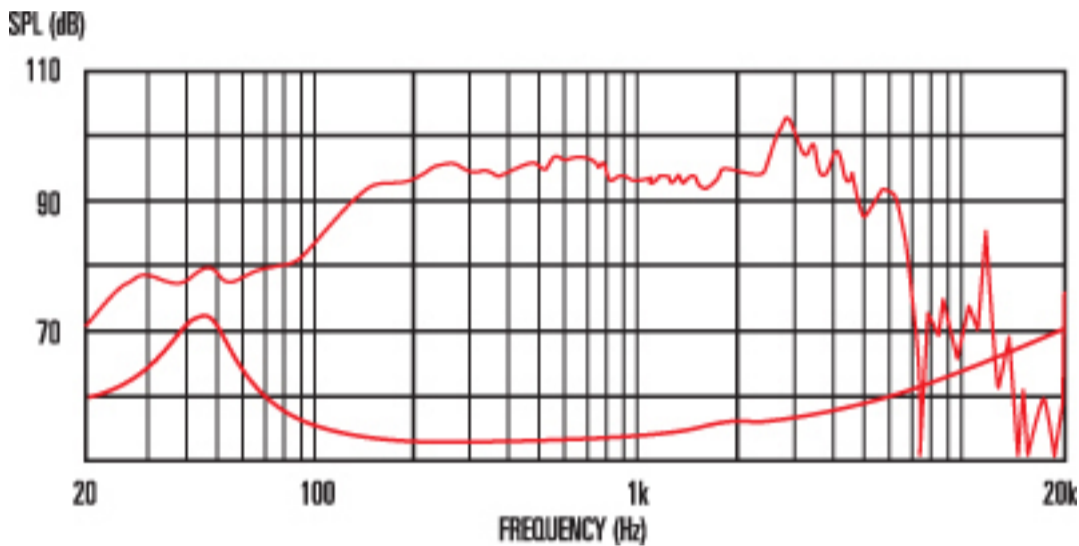

#### General Specifications

|                          |                     |
|--------------------------|---------------------|
| Nominal diameter         | 10", 254mm          |
| Power rating             | 200W                |
| Nominal impedance        | 8                   |
| Sensitivity              | 94dB                |
| Magnet type              | Ferrite             |
| Voice coil diameter      | 2", 50.8mm          |
| Coil material            | Copper              |
| Cone material            | Kevlar loaded paper |
| Former material          | Polyimide           |
| Surround material        | Cloth-sealed        |
| Frequency range          | 45-3500Hz           |
| Xmax                     | 0.15", 4mm          |
| Gap depth                | 0.31", 8mm          |
| Voice coil winding width | 0.62", 16mm         |

#### Small Signal Parameters

|              |                   |
|--------------|-------------------|
| D            | 0.21m/8.3in       |
| Fs           | 68Hz              |
| Mms          | 32.9g/1.16oz      |
| Qms          | 2.54              |
| Qes          | 0.53              |
| Mmd          | 29.26g/1.03oz     |
| Qts          | 0.44              |
| Re           | 6.03 $\Omega$     |
| Vas          | 25.8lt/0.91cu.ft. |
| Bl           | 12.88Tm           |
| Cms          | 0.15mm/N          |
| Rms          | 5.79kg/s          |
| Le (at 1kHz) | 0.92mH            |

#### Mounting Information

|                          |                          |
|--------------------------|--------------------------|
| Cut-out diameter         | 9", 229mm                |
| Diameter                 | 10.1", 256mm             |
| Mounting slot dimensions | 0.24x0.31", 6x8mm &#216; |
| Mounting slot PCD        | 9.6", 245mm              |
| Number of mounting slots | 4                        |
| Overall depth            | 4.3", 110mm              |
| Unit weight              | 6.6lb, 3kg               |