



### CDX14-3040

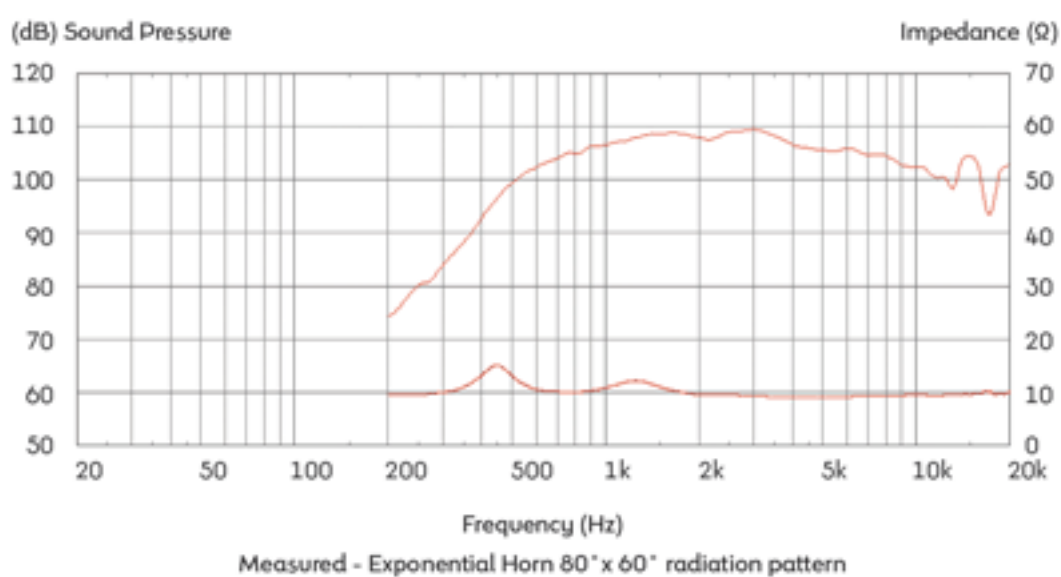

- 1,000Hz recommended min. crossover freq (12dB/oct)
- Single piece titanium diaphragm and surround

#### 8 Frequency Response

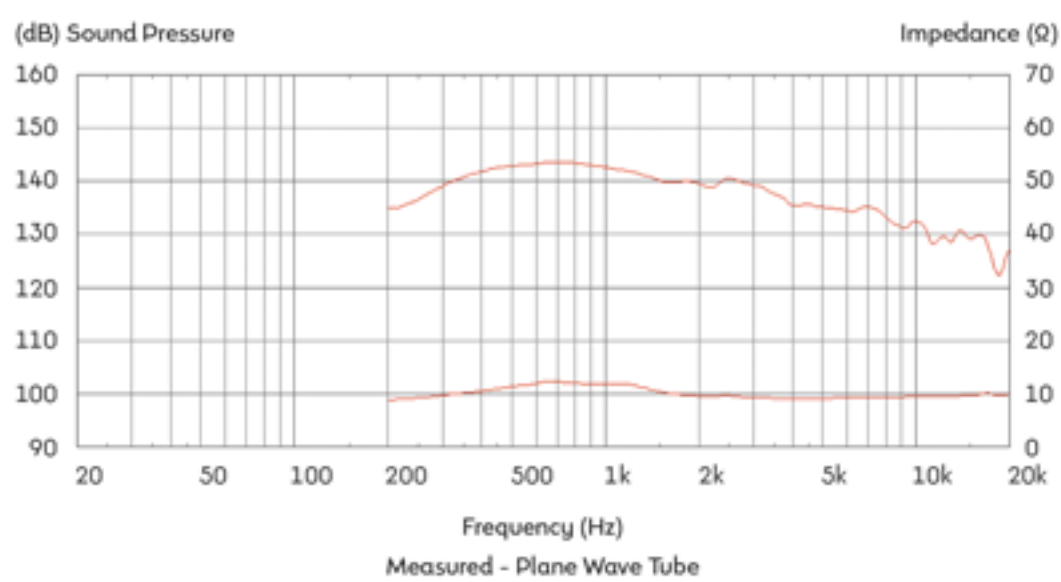

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than AES rating.
3. Measured on axis at 1W, 1m, using typical horn, in 2<sup>1</sup> anechoic environment

#### General Specifications

Power rating <sup>1</sup>	75Wrms
Continuous power rating <sup>2</sup>	150W
Nominal impedance	8
Sensitivity <sup>3</sup>	106.5dB
Frequency range	500-20,000Hz
Recommended min. crossover (12dB/oct)	1,000Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminum
Magnet type	Neodymium
Diaphragm material	Titanium
Surround material	Titanium

#### Mounting Information

Maximum width	135mm/5.3in
Depth	68mm/2.7in
Weight	1.4kg/3.1lb
Fitting	Flange(4 x M6 holes on 102mm /4in PCD)
Throat exit	35mm/1.4in

#### Packed Dimensions & Weight

Single pack size W x D x H	170mm x 140mm x 75mm /6.7in x 5.5in x 3.0in
Single pack weight	5.1kg/11.2lb