


CDX14-2410



>800Hz recommended min. crossover freq (12dB/oct)</p><p>Maximum modal suppression phase plug</p><p>Deep-drawn titanium diaphragm with polyimide surround</p>

8 Frequency Response

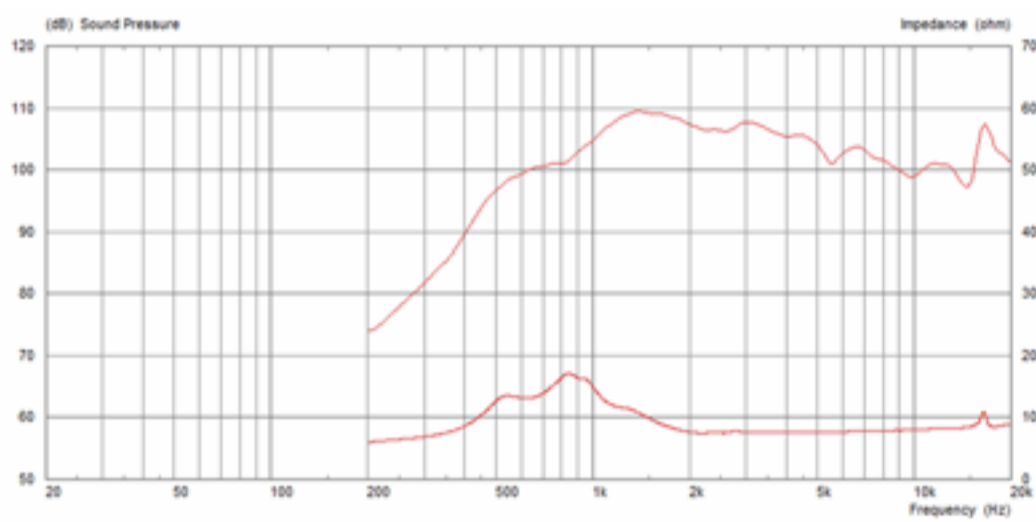

1. Tested for two hours on plane wave tube using continuous band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W/1m, using typical horn, in 2¹ anechoic environment.

General Specifications

Power rating ¹	50W
Continuous power rating ²	100W
Nominal impedance	8
Frequency range	800 - 20,000Hz
Sensitivity ³	106.5dB
Recommended min. crossover (12dB/oct)	1,200Hz
Voice coil diameter	60mm/2.4in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Polyimide

Mounting Information

Width	145mm/5.7in
Depth	70mm/2.75in
Weight	3.3kg/7.2lb
Fitting	4 M6 holes, 102mm/4.01in PCD)
Throat exit	35mm/1.4in