

## Coaxial Loudspeakers

### TFX0515

5-inch pressed steel chassis, ferrite magnet coaxial driver



- Silk dome tweeter
- 100° nominal HF coverage


### General Specifications

Nominal Diameter	125mm / 5in
Power Rating	150W
Continuous power rating	300W
Rated impedance	8 Ω
Sensitivity	89dB
Frequency range	80-4000Hz
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	0.65kg / 23oz
Voice coil diameter	38mm / 1.5in
Voice coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Elastomer
Suspension	Single
Gap height (Hg)	6mm / 0.24in
VC winding height (Hvc)	10.5mm / 0.41in

### Mounting Information

Overall diameter	136x151mm / 5.4x5.9in
Overall depth	72mm / 2.8in
Cut-out diameter	116mm / 4.6in
Mounting hole dimensions	4.5mm / 0.18in
Number of mounting holes	4
Mounting hole PCD	140mm / 5.5in
Unit weight	1.6kg / 3.5lb


## Frequency Response and Impedance Curves

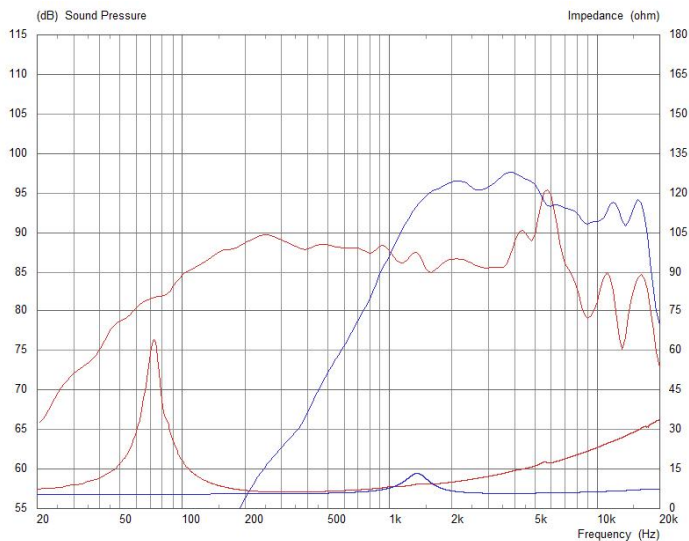

Red: LF response curve | Blue: HF response curve

### LF Contour

### HF Contour

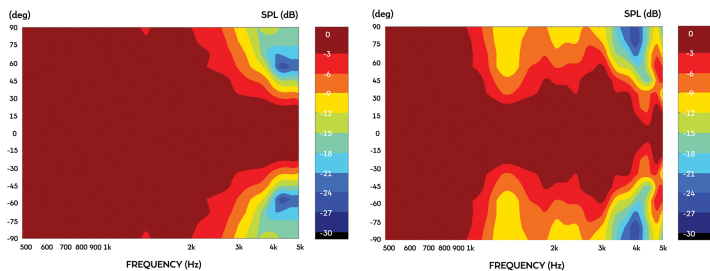

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**HF power rating:** Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2? anechoic environment.

**Xmax:**  $0.5 \cdot (H_{vc} - H_g) + 0.25 \cdot H_g$

**Suggested crossover design available online at** [celestion.com/speakerworld](http://celestion.com/speakerworld)

## Parameters

Sd	95cm <sup>2</sup> / 14.72in <sup>2</sup>
Fs	74Hz
Mms	9.073g / 0.32oz
Qms	8.293
Qes	0.503
Qts	0.474
Re	5.77 Ω
Vas	6.53l / 0.23ft <sup>3</sup>
Bi	6.96Tm
Cms	0.509mm/N
Rms	0.509kg/s
Le (at 1kHz)	0.363mH
Xmax	3.75mm / 0.14in

## Additional HF Specifications

Power rating	10W
Continuous power rating	20W
Rated impedance	8 Ω
Sensitivity	96dB
Frequency range	1400-20,000Hz
Recommended min. crossover	2200Hz
	12dB/oct
Voice coil diameter	25mm / 1in
Magnet type	Neodymium
Diaphragm material	Silk
Surround material	Silk

## Packed Dimensions & Weight

Single pack size W x D x H	200mm x 220mm x 125mm / 7.9in x 8.7in x 4.9in
Single pack weight	2.2kg / 4.85lb
Multi pack qty	30
Multi pack size W x D x H	750mm x 290mm x 310mm / 29.5in x 11.4in x 12.2in
Multi pack weight	50kg / 110lb

