

LF Loudspeakers

FTR18-4080FD

18-inch, cast aluminium chassis, ferrite magnet LF driver







- Glass loaded paper cone with weather-resistant impregnation
- Optimised double suspension
- Airflow vented magnet assembly for dynamic heat dispersion

General Specifications

 $\begin{array}{lll} \mbox{Nominal Diameter} & 457\mbox{mm} \, / \, 18\mbox{in} \\ \mbox{Power Rating} & 1000\mbox{W} \\ \mbox{Continuous power rating} & 2000\mbox{W} \\ \mbox{Rated impedance} & 8 \, \Omega \\ \mbox{Sensitivity} & 97\mbox{dB} \\ \mbox{Frequency range} & 30-2500\mbox{Hz} \end{array}$

Frequency range 30-2500Hz
Chassis type Cast aluminium
Magnet type Ferrite
Magnet weight 3 1kg / 1100z

Magnet weight
Voice coil diameter
Voice coil material
Former material

Annual Street S

Cone material Glass loaded paper (weather-resistant)

Surround material Cloth-sealed
Suspension Double
Gap height (Hg) 10mm / 0.39in
VC winding height (Hvc) 22mm / 0.87in

Mounting Information

Overall diameter 452mm / 17.8in

Overall depth 205mm / 8.1in

Cut-out diameter 416mm / 16.38in

Mounting hole dimensions 10x7mm / 0.39x0.27in


Number of mounting holes

Mounting hole PCD 429-440mm / 16.89-17

.32in

Unit weight 9.8kg / 21.6lb

Frequency Response and Impedance Curves

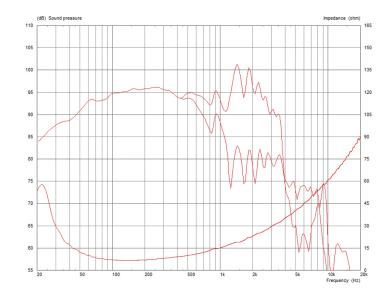

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off

axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2? anechoic environment.

Parameters: Measured after unit subjected to pre-conditioning signal.

Xmax: 0.5*(Hvc-Hg) + 0.25*Hg

Parameters

Sd	1134.12cm2 / 175.79f
	t 3
Fs	25.20Hz
Mms	177.81g / 6.27oz
Qms	4.750
Qes	0.304
Qts	0.286
Re	5.62 Ω
Vas	408.72l / 14.43ft ³
Bi	22.81Tm
Cms	0.23mm/N
Rms	5.92kg/s
Le (at 1kHz)	1.50mH
Xmax	8.5mm / 0.34in

Packed Dimensions & Weight

m / 19.7in x 19.7in

x 9.4in

Single pack weight 11.5kg / 25.3lb

Multi pack qty 24

Multi pack size W x D x H 1210mm x 1050mm x 98

0mm / 47.6in x 41.3i

n x 35.4in

Multi pack weight 265kg / 580lb

