

LF Loudspeakers

FTR08-2011D

8-inch, cast aluminium chassis, ferrite magnet mid/bass driver







- Coated Kevlar-loaded cone for enhanced weather resistance
- Copper sleeved pole reduces HF inductive rise
- Airflow vented magnet assembly for dynamic heat dispersion

General Specifications

 $\begin{array}{lll} \mbox{Nominal Diameter} & 200\mbox{mm / 8in} \\ \mbox{Power Rating} & 200\mbox{W} \\ \mbox{Continuous power rating} & 400\mbox{W} \\ \mbox{EIA power rating} & 350\mbox{W} \\ \mbox{Rated impedance} & 8\ \Omega \\ \mbox{Sensitivity} & 93\mbox{dB} \\ \mbox{Frequency range} & 70-6000\mbox{Hz} \end{array}$

Frequency range 70-6000Hz
Chassis type Cast aluminium

Magnet type Ferrite
Magnet weight 1.2kg / 42oz
Voice coil diameter 50mm / 2in
Voice coil material Round copper
Former material Polyimide

Cone material Kevlar loaded paper

Surround material Cloth-sealed

Suspension Single

Gap height (Hg) 8mm / 0.31in VC winding height (Hvc) 15mm / 0.59in

Mounting Information


Overall diameter 225mm / 8.8in
Overall depth 102mm / 4in
Cut-out diameter 187mm / 7.4in
Mounting hole dimensions 6.5mm / 0.26in

Number of mounting holes

Mounting hole PCD 210mm / 8.3in Unit weight 3.65kg / 8lb

8

Frequency Response and Impedance Curves

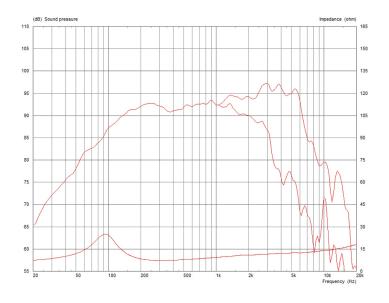

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off

axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2? anechoic environment.

Parameters: Measured after unit subjected to pre-conditioning signal.

Xmax: 0.5*(Hvc-Hg) + 0.25*Hg

Parameters

Sd	226.98cm2 / 35.18in ²
Fs	86.10Hz
Mms	27.75g / 0.98oz
Qms	2.238
Qes	0.541
Qts	0.436
Re	5.82 Ω
Vas	8.99I / 0.32ft ³
Bi	12.71Tm
Cms	0.12mm/N
Rms	6.71kg/s
Le (at 1kHz)	0.38mH
Xmax	5.5mm / 0.22in

Packed Dimensions & Weight

Single pack size W x D x H 226mm x 226mm x 130m

m / 8.9in x 8.9in x

5.1in

Single pack weight 3.8kg / 8.4lb

Multi pack qty 8

Multi pack size W x D x H 470mm x 450mm x 270m

m / 18.5in x 17.7in

x 10.6in

Multi pack weight 31kg / 68lb

