

## Legacy Loudspeakers

### TF1530SL (Legacy)

15-inch pressed steel chassis, ferrite magnet bass/mid driver



- Airflow vented magnet assembly for dynamic heat dispersion
- Compact high flux Dual Magnet Motor design


### General Specifications

Nominal Diameter	381mm / 15in
Power Rating	350W
Continuous power rating	700W
EIA power rating	500W
Rated impedance	8 $\Omega$
Sensitivity	98dB
Frequency range	40-3000Hz
Chassis type	Pressed Steel
Magnet type	Ferrite
Magnet weight	1.7kg / 60oz
Voice coil diameter	75mm / 3in
Voice coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	16mm / 0.63in
Additional impedances	4?

### Mounting Information

Overall diameter	385mm / 15.16in
Overall depth	161mm / 6.3in
Cut-out diameter	352mm / 13.86in
Mounting hole dimensions	9.4x6.2mm / 0.37x0.24in
Number of mounting holes	8
Mounting hole PCD	369mm / 14.57in
Unit weight	5.0kg / 11.0lb

## Frequency Response and Impedance Curves

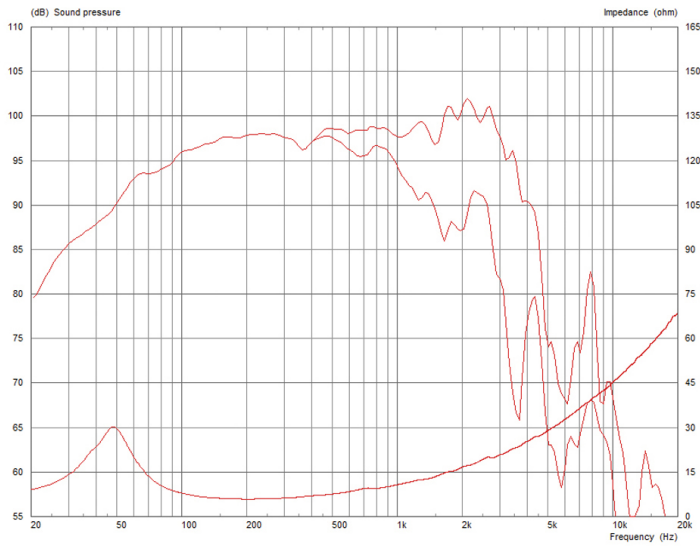

Topmost curve: Frequency response on axis |  
Secondary curve: Frequency response at 45° off axis

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2? anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

**Xmax:** Hvc-Hg/2

## Parameters

Sd	855.30cm <sup>2</sup> / 132.57in <sup>2</sup>
Fs	46.20Hz
Mms	87.70g / 3.09oz
Qms	3.060
Qes	0.446
Qts	0.389
Re	5.07 Ω
Vas	140.08l / 4.95ft <sup>3</sup>
Bi	17.01Tm
Cms	0.14mm/N
Rms	8.32kg/s
Le (at 1kHz)	0.99mH
Xmax	4mm / 0.16in

## Packed Dimensions & Weight

Multi pack qty	45
Multi pack size W x D x H	1200mm x 1000mm x 980mm / 47.2in x 39.4in x 38.6in
Multi pack weight	265kg / 585lb