



TEN

BY CELESTION






Consistently superior performance.

The result of a specialist development program within Celestion's UK-based R&D facility, Ten Squared (Ten²) is a range of low frequency pro audio drivers, designed and engineered without compromise to deliver consistently superior levels of performance in the most demanding professional sound reinforcement applications, even after hundreds of hours of use.

Ten Key Features


That add up to a new standard in LF driver performance

The Ten² development program revisited every detail of driver design, developing and testing a series of incremental improvements that combine to redefine standards of performance and durability in professional low frequency loudspeakers.




Precision Tuned Venting

Precision Tuned Venting (PTV) harnesses the cooling effects of constant airflow in a set of precisely dimensioned vents, enabling cooling around the coil and magnet assembly to be significantly improved - by up to 30C compared to conventional designs.




Custom Voice Coil Structure

Celestion winds its own voice coils using proprietary adhesion and voice coil structure solutions to maximise product lifespan and performance longevity.




Reduced Power Compression

Highly efficient PTV cooling delivers additional reduction in power compression (loss of driver efficiency), as well as lower thermal stress on the voice coil, leading to improved performance, endurance and longevity.




Enhanced Moisture Protection

A water-based solvent is applied to one or both sides of the loudspeaker's cone (depending on speaker model and desired application). This significantly improves the driver's ability to resist direct exposure to water and higher levels of humidity, and also improves product durability.




Polysiloxane Laminated Dual Suspension

Polysiloxane (a silicone polymer) is sandwiched between two resin-impregnated layers which enables the laminated suspension to be worked much harder without losing stiffness, giving better coil control, making DC shift less likely and increasing speaker longevity.




Laser-Cauterized Lead Out Wire Holes

Weaving lead out wires into the suspension through laser cut holes reduces 'whipping' and lessens the fatigue on wires and joints caused by high power and cone excursion.




Reconfigured Magnet Assembly For Greater Excursion

A re-configured magnet assembly allows much greater cone excursion before damage occurs (X_{mech}) and best-in-class X_{protection} figures (the distance the coil and cone move, measured to the point where both BL and C_{ms} have both reduced to 30% of their resting value).



Multi-layer Inside/Outside Coil Windings

Celestion's voice coils are wound inside/outside in multiple layers, to maximise cooling potential with the greatest amount of surface area exposed to free air. This further contributes to the reduction of both power compression and thermal stress.



Convergent Motor Strength & Mechanical Compliance

Electrical motor strength BL and mechanical compliance C_{ms} reach their defined X_{protection} limit at practically the same point: achieving a low distortion performance even during high excursion.



Precision built in the UK

TSQ drivers are built on the newly-commissioned, robotically-assisted production line at Celestion's UK-based loudspeaker research and manufacturing facility, and rigorously tested in line with an exacting list of performance criteria.



TSQ1230

12-inch cast aluminium chassis
neodymium magnet low frequency
loudspeaker

1400W
continuous power
rating

98dB
sensitivity

3-inch
copper clad
aluminium voice coil




General Specifications	
Nominal diameter	305mm / 12in
Power rating ¹	700W
Continuous power rating ²	1400W
Rated impedance	8Ω
Sensitivity ³	98dB
Frequency range	50-3,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	75mm / 3in
Voice coil material	Copper clad aluminium
Former material	Glass Fibre
Cone material	Glass loaded cellulose
Surround material	Triple roll, cloth sealed
Suspension	Single
Gap height (H _g)	10mm / 0.39in
VC winding height (H _{vc})	18.5mm / 0.73in

Mounting Information	
Overall diameter	315mm / 12.4in
Overall depth	144.9mm / 5.73in
Cut-out diameter	282mm / 11.1in
Mounting hole dimensions	10x6.5mm / 0.39x0.26in
Number of mounting holes	8
Mounting hole PCD	294-300mm / 11.6-11.8in
Flange & gasket thickness	10.4mm / 0.41in
Unit weight	4.9kg / 10.8lb

Parameters ⁴	
Sd	530.93cm ² / 82.29in ²
Fs	55Hz
Mms	69.5g / 2.45oz
Qms	8.11
Qes	0.315
Qts	0.303
Re	5.2Ω
Vas	45.2l / 1.6ft ³
Bl	20.5Tm
Cms	0.11mm/N
Rms	3.05kg/s
Le (at 1kHz)	0.72mH
Xmax ⁵	6.75mm / 0.27in
Xmech ⁶	16.0mm / 0.63in

Packed Dimensions & Weights	
Single pack size (WxDxH)	350mm x 350mm x 180mm
	13.8in x 13.8in x 7.1in
Single pack weight	5.8kg / 12.8lb

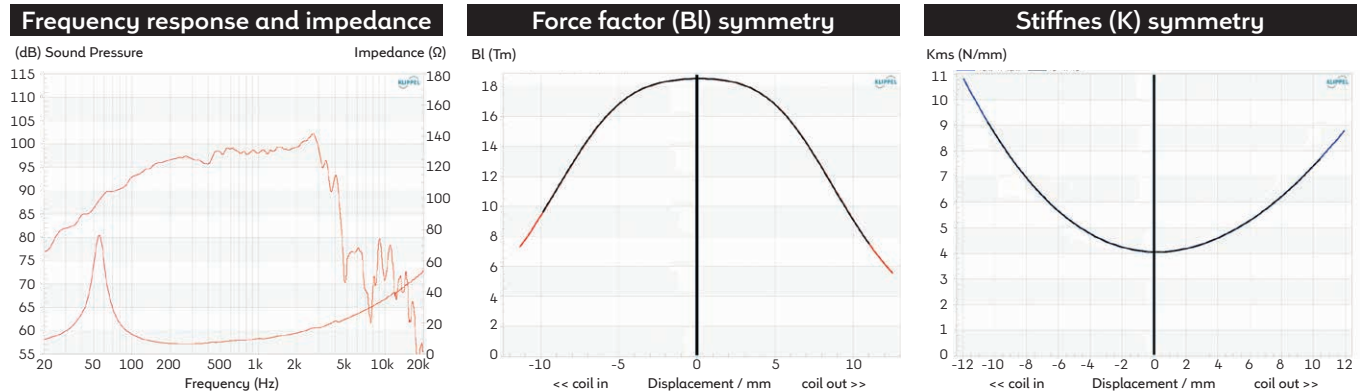

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5*(Hvc-Hg) + 0.25*Hg. 6. Maximum peak-to-peak excursion before damage.



TSQ1535

15-inch cast aluminium chassis
neodymium magnet low frequency
loudspeaker

1800W
continuous power
rating

98.2dB
sensitivity

3.5-inch
copper clad
aluminium voice coil




General Specifications	
Nominal diameter	381mm / 15in
Power rating ¹	900W
Continuous power rating ²	1800W
Rated impedance	8Ω
Sensitivity ³	98.2dB
Frequency range	45-3,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	90mm / 3.5in
Voice coil material	Copper clad aluminium
Former material	Glass Fibre
Cone material	Glass loaded cellulose
Surround material	Triple roll, cloth sealed
Suspension	Dual polysiloxane-laminated
Gap height (H _g)	10mm / 0.39in
VC winding height (H _{vc})	21mm / 0.83in

Mounting Information	
Overall diameter	393mm / 15.4in
Overall depth	175.2mm / 6.89in
Cut-out diameter	354mm / 13.9in
Mounting hole dimensions	10x7mm / 0.39x0.28in
Number of mounting holes	8
Mounting hole PCD	367-374mm / 14.4-14.72in
Flange & gasket thickness	11.9mm / 0.47in
Unit weight	5.7kg / 12.6lb

Parameters ⁴	
Sd	855.3cm ² / 33.7in ²
Fs	50Hz
Mms	111.9g / 3.95oz
Qms	4.921
Qes	0.432
Qts	0.397
Re	5.2Ω
Vas	94.02l / 3.32ft ³
Bl	20.65Tm
Cms	0.091mm/N
Rms	7.148kg/s
Le (at 1kHz)	0.884mH
Xmax ⁵	8.0mm / 0.31in
Xmech ⁶	22.0mm / 0.87in

Packed Dimensions & Weights	
Single pack size (WxDxH)	435mm x435mm x 200mm
	17.1in x 17.1in x 7.9in
Single pack weight	7kg / 15.4lb

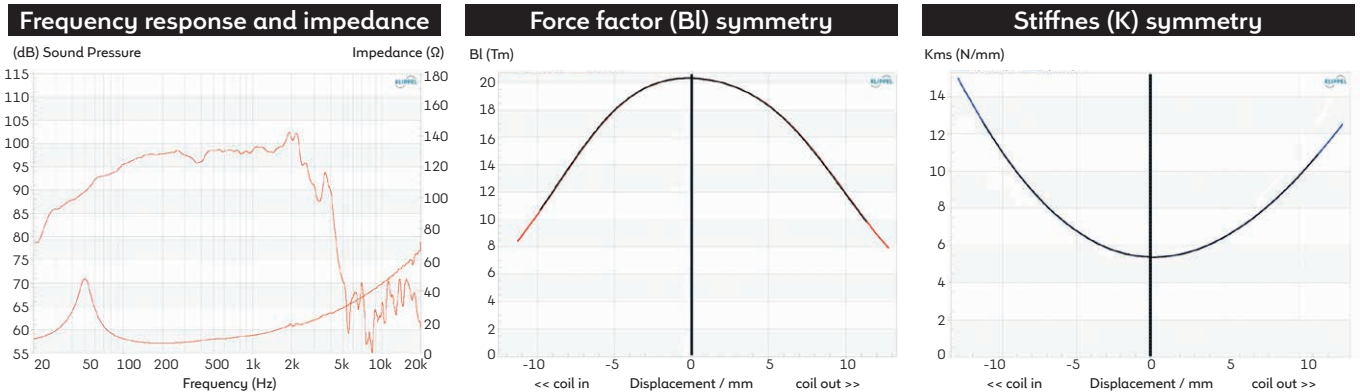

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5*(Hvc-Hg) + 0.25*Hg. 6. Maximum peak-to-peak excursion before damage.



TSQ1845

18-inch cast aluminium chassis
neodymium magnet low frequency
loudspeaker

3600W continuous power rating
96.5dB sensitivity
4.5-inch round copper voice coil




General Specifications	
Nominal diameter	457mm / 18in
Power rating ¹	1800W
Continuous power rating ²	3600W
Rated impedance	8Ω
Sensitivity ³	96.5dB
Frequency range	30-1,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	115mm / 4.5in
Voice coil material	Round copper
Former material	Glass Fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Dual, polysiloxane-laminated
Gap height (H _g)	12mm / 0.46in
VC winding height (H _{vc})	36mm / 1.42in

Mounting Information	
Overall diameter	460mm / 18.1in
Overall depth	235mm / 9.5in
Cut-out diameter	414mm / 16.29in
Mounting hole dimensions	7x11mm / 0.28x0.43in
Number of mounting holes	8
Mounting hole PCD	432-441mm / 17.04-17.36in
Flange & gasket thickness	17mm / 0.67in
Unit weight	11.8kg / 26lb

Parameters ⁴	
Sd	1134cm ² / 175.8in ²
Fs	35Hz
Mms	316g / 11.18oz
Qms	8.712
Qes	0.300
Qts	0.290
Re	5.0Ω
Vas	119.3l / 4.21ft ³
Bl	33.8Tm
Cms	0.065mm/N
Rms	7.99kg/s
Le (at 1kHz)	3.06mH
Xmax ⁵	15mm / 0.47in
Xmech ⁶	40mm / 1.57in
Efficiency η ₀	1.8%

Packed Dimensions & Weights	
Single pack size (WxDxH)	500mm x 500mm x 280mm
	19in x 19in x 11in
Single pack weight	12.3kg / 27.1lb

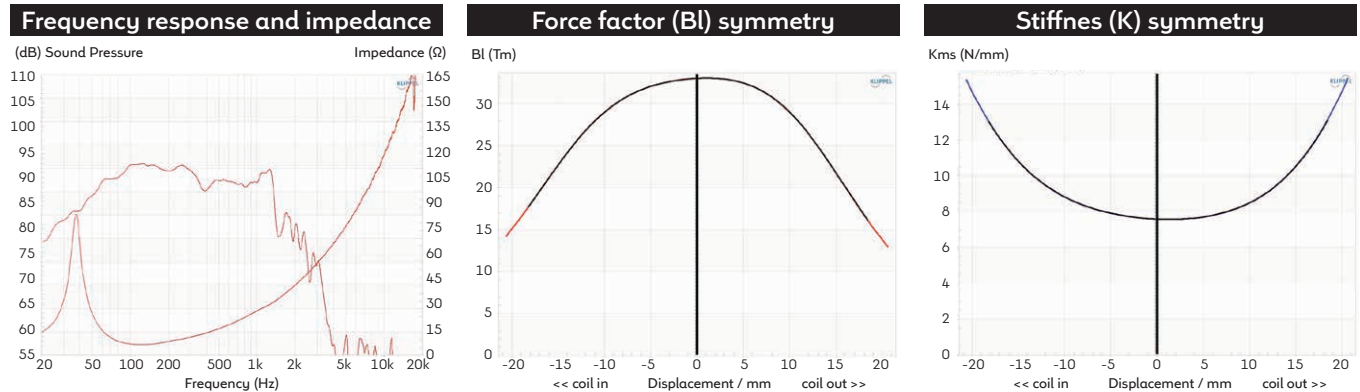

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5*(Hvc-Hg) + 0.25*Hg. 6. Maximum peak-to-peak excursion before damage.



TSQ2145

21-inch cast aluminium chassis
neodymium magnet low frequency
loudspeaker

3600W continuous power rating
97dB sensitivity
4.5-inch round copper voice coil




General Specifications	
Nominal diameter	530mm / 21in
Power rating ¹	1800W
Continuous power rating ²	3600W
Rated impedance	8Ω
Sensitivity ³	97dB
Frequency range	30-1,000Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	115mm / 4.5in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Triple, polysiloxane-laminated
Gap height (H _g)	12mm / 0.46in
VC winding height (H _{vc})	36mm / 1.42in

Mounting Information	
Overall diameter	541mm / 21.3in
Overall depth	250mm / 9.84in
Cut-out diameter	505mm / 19.88in
Mounting hole dimensions	8.5x10mm / 0.33x0.39in
Number of mounting holes	8
Mounting hole PCD	525-528mm / 20.61-20.79in
Flange & gasket thickness	17mm / 0.67in
Unit weight	13.8kg / 30.4lb

Parameters ⁴	
Sd	1661.9cm ² / 257.9in ²
Fs	30Hz
Mms	435.2g / 15.35oz
Qms	8.393
Qes	0.359
Qts	0.344
Re	5.0Ω
Vas	253.8l / 8.96ft ³
Bl	33.8Tm
Cms	0.065mm/N
Rms	9.77kg/s
Le (at 1kHz)	3.91mH
Xmax ⁵	15mm / 0.46in
Xmech ⁶	40mm / 1.57in
Efficiency η ₀	1.9%

Packed Dimensions & Weights	
Single pack size (WxDxH)	575mm x 575mm x 280mm
	22.6in x 22.6in x 11in
Single pack weight	14.5kg / 32lb

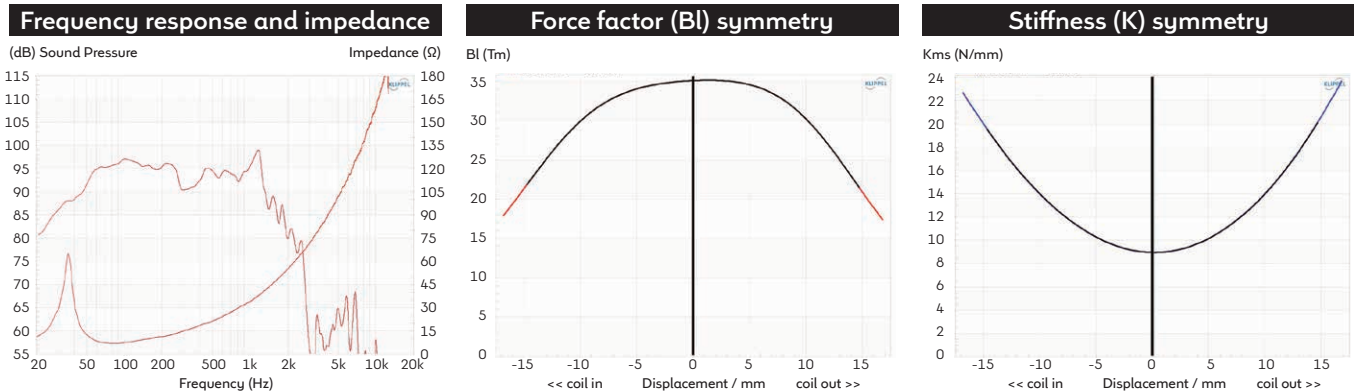

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating. 3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5*(Hvc-Hg) + 0.25*Hg. 6. Maximum peak-to-peak excursion before damage.

TSQ2460

24-inch cast aluminium chassis
neodymium magnet low frequency
loudspeaker

4800W
continuous power
rating

98dB
sensitivity

6-inch
round copper
voice coil



General Specifications	
Nominal diameter	610mm / 24in
Power rating ¹	2400W
Continuous power rating ²	4800W
Rated impedance	8Ω
Sensitivity ³	98dB
Frequency range	20-200Hz
Chassis type	Cast aluminium
Magnet type	Neodymium
Voice coil diameter	152mm / 6in
Voice coil material	Round copper
Former material	Glass Fibre
Cone material	Glass loaded cellulose, water-resistant coating front & back
Surround material	Triple roll, cloth sealed
Suspension	Triple, polysiloxane-laminated
Gap height (H _g)	15mm / 0.59in
VC winding height (H _{vc})	45mm / 1.77in


Mounting Information	
Overall diameter	627mm / 24.7in
Overall depth	280mm / 11in
Cut-out diameter	571mm / 22.5in
Mounting hole dimensions	8.5x9mm / 0.33x0.35in
Number of mounting holes	8
Mounting hole PCD	596.3-606mm / 23.47-23.86in
Flange & gasket thickness	21mm / 0.83in
Unit weight	22kg / 48lb

Preliminary Information


Parameters ⁴	
Sd	2239cm ² / 347in ²
Fs	29Hz
Mms	530g / 18.69oz
Qms	10.30
Qes	0.31
Qts	0.30
Re	5.1Ω
Vas	404l / 14.26ft ³
Bl	40.5Tm
Cms	0.057mm/N
Rms	9.1kg/s
Le (at 1kHz)	2.5mH
Xmax ⁵	18.75mm / 0.73in
Xmech ⁶	40mm / 1.57in
Efficiency η ₀	3.1%

Packed Dimensions & Weights	
Single pack size (WxDxH)	650mm x 650mm x 290mm
	25.5in x 25.5in x 11.4in
Single pack weight	25kg / 55lb


Frequency response and impedance*

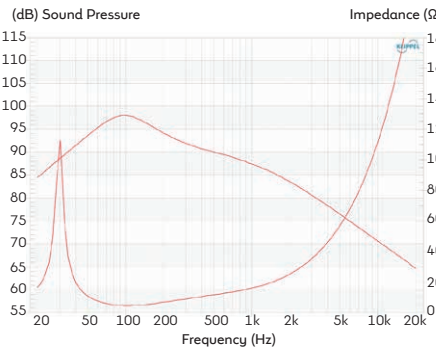

Force factor (Bl) symmetry*

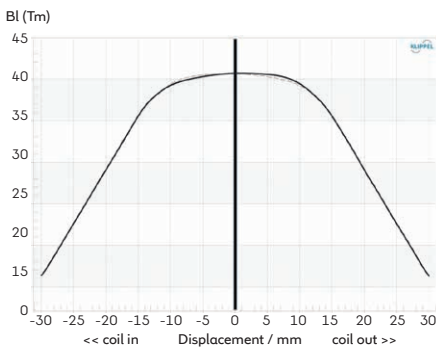

Stiffnes (K) symmetry*

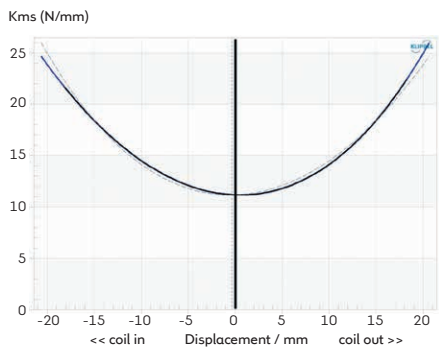

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air. 2. Defined as 3dB greater than the AES rating.
3. Measured on axis at 1W, 1m in 2n anechoic environment. 4. Measured after unit subjected to pre-conditioning signal. 5. 0.5*(Hvc-Hg) + 0.25*Hg. 6. Maximum peak-to-peak excursion before damage.
*Simulated data



CELESTION



celestion.com

Please note that Celestion adopt a progressive policy and we reserve the right to alter drive unit specifications and/or appearance without prior notice. E&OE
LIT0715/0823