

HF Compression Drivers

DT25S



1-inch diameter neodymium magnet tweeter

- Very compact, low weight, high sensitivity tweeter
- 2,200Hz recommended min. crossover freq (12dB/oct)
- Single piece silk diaphragm and surround

20W

Continuous power rating

94dB

sensitivity

1-inch

Copper clad aluminium coil voice

General Specifications

Power Rating	10W
Continuous power rating	20W
Rated impedance	8 ohm
Sensitivity	94dB
Frequency range	1,700-20,000Hz
Recommended min. crossover (12 dB/oct)	2,200Hz
Magnet type	Neodymium
Voice coil diameter	25mm / 1in
Voice coil material	Copper clad aluminium
Diaphragm material	Silk


Mounting Information

Width	65mm / 2.6in
Depth	24.5mm / 0.96in
Fitting	Bolt (4x 4mm/0.16in holes on 56.5mm/2.2in PCD)
Throat exit	25mm / 1in
Unit weight	88g / 23oz

Packed Dimensions & Weight

Single pack size W x D x H	88mm x 88mm x 60mm / x 3.46in 3.46in x 2.36in
Single pack weight	137g / 4.83oz

Frequency Response and Impedance

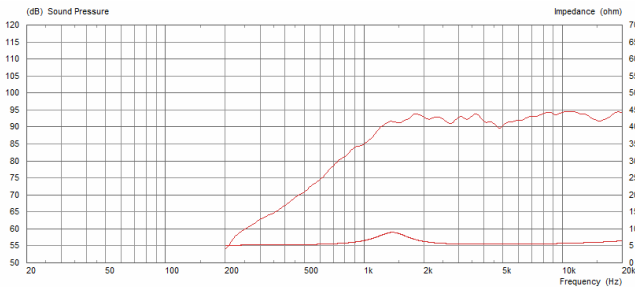

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2° anechoic environment.