

# **Full Range Live Response**

## F12-X200

A 12-inch ceramic full-range speaker for use with amp modellers and IRs







Finally a dedicated guitar speaker for amp modellers and IRs: the F12-X200 is a truly full range driver that delivers a frequency response from 60Hz all the way up to 20kHz. The higher frequency part of the signal is reproduced using a Celestion compression driver which has been integrated using a high quality crossover circuit, this enables the F12-X200 to reproduce the full spectrum of audible frequencies for the most accurate output possible whatever your environment and set-up. The F12-X200's response is remarkably neutral with Celestion technology built in to ensure there are no unwanted colourations that can overpower the input signal. However the lighter moving mass and straighter sided cone of the type commonly used with guitar speakers gives the X200 the feel and live response of a traditional guitar speaker delivering all the physical feedback you'd expect from playing through a conventional guitar rig. It's not just FRFR, it's Full Range LIVE Response. Used with amp modellers or IRs, in a backline cab or wedge monitor, on stage or in the

## **General Specifications**

**Nominal Diameter** 305mm / 12in Power Rating 200W Rated impedance 8Ω Sensitivity 97dB Chassis type Pressed steel Ceramic Magnet type Voice coil diameter 51mm / 2in Voice coil material Round copper Frequency range 60-20.000Hz Resonance frequency Fs 75Hz

5.91 Ω


## **Mounting Information**

DC resistance, Re

Cut-out diameter 283mm / 11.1in Diameter 309mm / 12.2in Magnet structure diameter 170mm / 6.7in 7.9mm / 0.31in Mounting hole dimensions 297mm / 11.7in Mounting hole PCD Number of mounting holes Chassis depth (inc gasket) 98mm / 3.86in Magnet depth 67mm / 2.64in Overall depth 165mm / 6.5in Unit weight 4.1kg / 9.1lb

#### tondio: fited seise fit juso sound like great guitar

#### 8 Ω Frequency Response

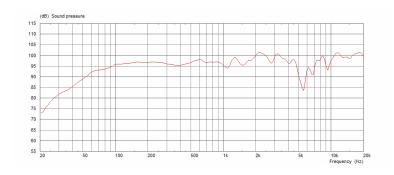

#### **Parameters**

D 0.26m / 10.24in Fs 69.8Hz 50.19g / 1.77oz Mms Qms 12.007 Qes 0.831 Qts 0.777 Re 5.91 Ω Vas 47.3I / 1.67ft <sup>3</sup> Bi 12.5 Cms 0.103

Rms 1.834 Le (at 1kHz) 0.102mH (complete sy

stem)

