

## HF Compression Drivers

### CDX14-3045

1.4-inch exit neodymium magnet compression driver



- **Single piece titanium diaphragm and surround**
- **Enhanced surround shape for greater linearity**
- **High temperature polymer clamp ring minimises distortion**


### General Specifications

Power Rating	120W
Continuous power rating	240W
Rated impedance	8 $\Omega$
Sensitivity	108dB
Frequency range	500-20,000Hz
Recommended min. crossover (12dB/oct)	800Hz
Magnet type	Neodymium
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Diaphragm material	Titanium
Surround material	Titanium
Additional impedances	16


### Mounting Information

Width	117mm / 4.6in
Depth	59mm / 2.3in
Fitting	Bolt (4 x M6 holes on 102mm/4in PCD)
Throat exit	35mm / 1.4in
Unit weight	2kg / 4.4lb

## Frequency Response and Impedance Curves

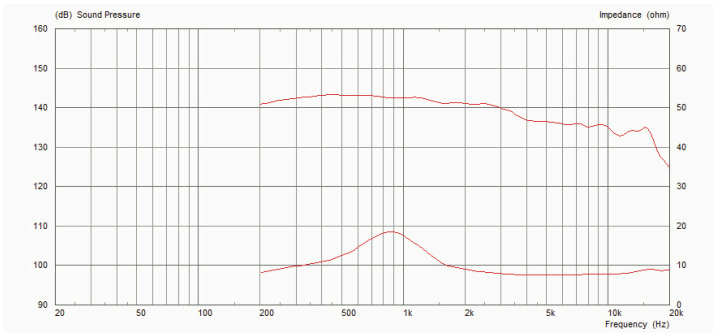

Measured - Plane Wave Tube

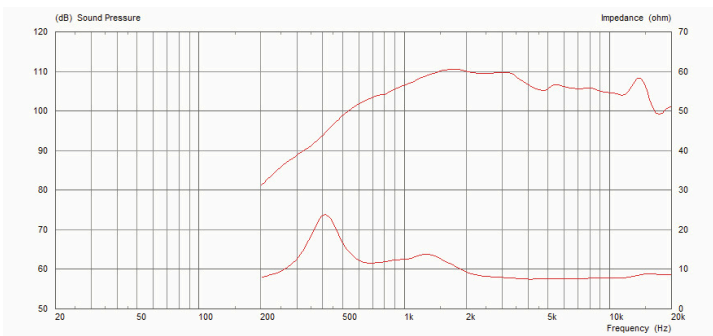

Measured - Exponential Horn 90° x 40° radiation pattern

Power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m, using typical horn, in 2 anechoic environment.

## Packed Dimensions & Weight

Single pack size W x D x H	170mm x 140mm x 75mm / 6.7in x 5.5in x 3 in
Single pack weight	2.2kg / 4.9lb