

### CF1230F

12-inch, cast aluminium chassis, ferrite magnet LF driver



- **Balanced airflow venting provides enhanced cooling**
- **Single demodulation ring**
- **Glass loaded paper cone with weather-resistant impregnation**


### General Specifications

Nominal Diameter	305mm / 12in
Power Rating	500W
Continuous power rating	1000W
Rated impedance	8 $\Omega$
Sensitivity	98dB
Frequency range	50-3000Hz
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	2.2kg / 75oz
Voice coil diameter	75mm / 3in
Voice coil material	Edgewound copper clad aluminium
Former material	Glass fibre
Cone material	Glass loaded paper (weather-resistant)
Surround material	Cloth-sealed
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	19mm / 0.75in

### Mounting Information

Overall diameter	315mm / 12.4in
Overall depth	153mm / 6.0in
Cut-out diameter	285.6mm / 11.24in
Mounting hole dimensions	10x6.5mm / 0.39x0.26 in
Number of mounting holes	8
Mounting hole PCD	294-300mm / 11.6-11.8in
Unit weight	6.8kg / 14.9lb

## Frequency Response and Impedance Curves

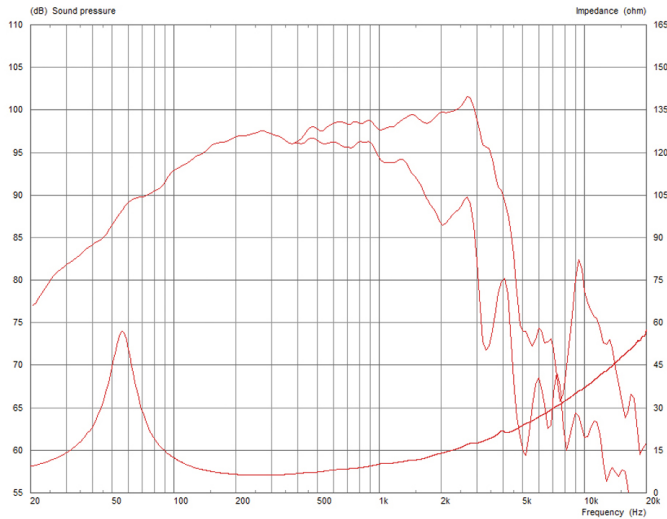

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Parameters: Measured after unit subjected to pre-conditioning signal.

$X_{max} = 0.5 \cdot (H_{vc} - H_g) + 0.25 \cdot H_g$

## Parameters

Sd	530.93cm <sup>2</sup> / 82.29in <sup>2</sup>
Fs	56.50Hz
Mms	63.75g / 2.25oz
Qms	4.33
Qes	0.342
Qts	0.317
Re	5.08 Ω
Vas	49.61l / 1.75ft <sup>3</sup>
Bi	18.33Tm
Cms	0.12mm/N
Rms	5.23kg/s
Le (at 1kHz)	0.74mH
Xmax	7.5mm / 0.3in

## Packed Dimensions & Weight

Multi pack qty	60
Multi pack size W x D x H	1210mm x 1050mm x 980mm / 47.6in x 41.3in x 35.4in
Multi pack weight	435kg / 870lb

**CELESTION**